

FIT EOS SURFACE

Rigid Fixture · Static White

Features

- Easy plug & play rigid fixture, snap to join with every other piece
- IP65 rated, ideal for damp location and sheltered exterior
- 5 years warranty


Applications

Under cabinets, displays, shelves, closets, millwork, furnitures, etc.




Date _____ Fixture type _____

Project name _____ Project phase _____



Dimensions

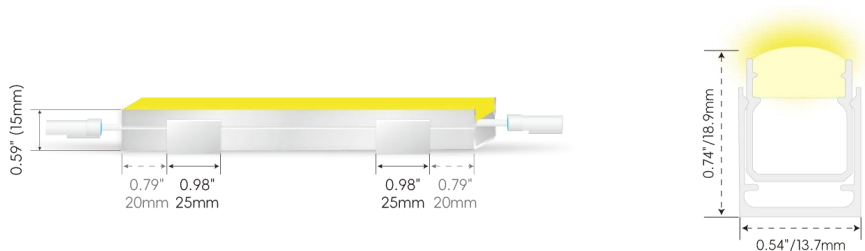

Order Code

Model	Environment	Voltage	CCT	Power	Mounting	Left Feed Entry
FTEOSS	W5-Wet (IP65)	24-DC24V	22-2200K 27-2700K 30-3000K 35-3500K 40-4000K 57-5700K	100-1.00W/ft 200-2.00W/ft 293-2.93W/ft	CL Surface mounting clip ECL Extension Surface mounting clip MCL Surface magnetic clip ACL Adjustable mounting clip * 1 clip per foot	B Bottom MC Male connector with 0.98ft (30cm) cable C Closed FC Female connector with 0.98ft (30cm) cable NA Only for Closed Feed Entry

Assembly Builder

Assembly Builder

Right Feed Entry			Length	
B Bottom	MC	Male connector with 0.98ft (30cm) cable	Max. nominal	Made to order up to 78.7in.
C Closed	FC	Female connector with 0.98ft (30cm) cable	Increment	1.09in. (28mm)
	NA	Only for Closed Feed Entry		

Mounting Order Code

Product Code
Please select on the Mounting Options page.

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Lumen Output (lm/ft)

Temp./Color	2.93W/ft
2200K	379
2700K	391
3000K	403
3500K	409
4000K	418
5700K	397
Max. Run for Class 2	16.4(5m)


Technical Details

Efficacy	142.7lm/W
CRI	Ra≥80
LED MacAdam	3 steps
Average Life(L70)	> 54,000 hours
Storage Temperature	-13~140°F (-25°C~ 60°C)
Operating Temperature	-40~113°F (-40°C~ 45°C) @2.93W/ft

FIT EOS SURFACE

Rigid Fixture · Static White

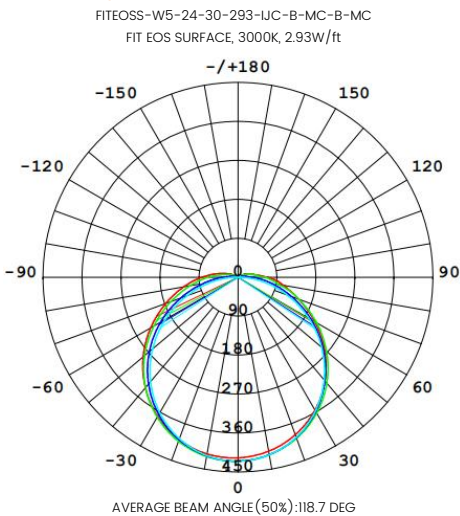Photometry




Zonal Lumen Summary 3000K

Zone	Lumen	% Fixture
0-30	331.5	23.2%
0-40	546.4	38.2%
0-60	986.1	69%
0-90	1358	94.9%
0-180	1430	100%


UNIT: CD
— C0/180, 123.6
— C30/210, 121.5
— C60/240, 116.2
— C90/270, 113.4

Feed Entry / End Cap Options

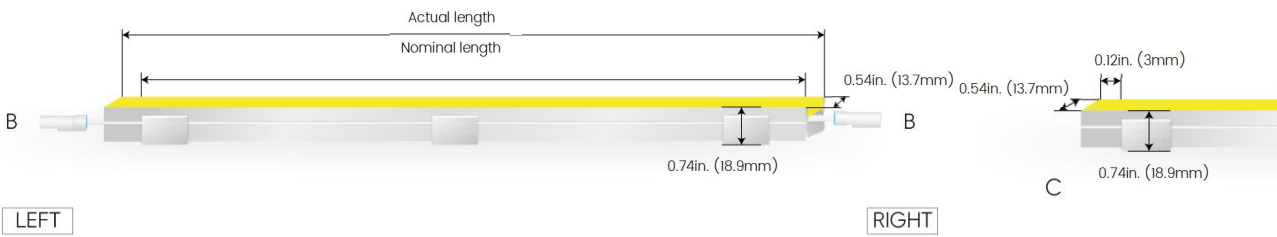IJC: Clear injected end cap – IP65, factory-made only



Connector Wire Options








 MC: Male connector, 2pin, 24AWG, IP20, 0.66ft(20cm)

 FC: Female connector, 2pin, 24AWG, IP20, 0.66ft(20cm)

FIT EOS SURFACE

Rigid Fixture · Static White

Mounting Options

			FTEOSS-CL <table><tr><td>Name</td><td>Mounting clip</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>0.98in. (25mm)</td></tr></table>	Name	Mounting clip	Material	Aluminum	Standard Length	0.98in. (25mm)
Name	Mounting clip								
Material	Aluminum								
Standard Length	0.98in. (25mm)								
			FTEOSS-ECL <table><tr><td>Name</td><td>(Extension) Mounting clip</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>1.97in. (50mm)</td></tr></table>	Name	(Extension) Mounting clip	Material	Aluminum	Standard Length	1.97in. (50mm)
Name	(Extension) Mounting clip								
Material	Aluminum								
Standard Length	1.97in. (50mm)								
			FTEOSS-MCL <table><tr><td>Name</td><td>Magnetic clip</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>0.98in. (25mm)</td></tr></table>	Name	Magnetic clip	Material	Aluminum	Standard Length	0.98in. (25mm)
Name	Magnetic clip								
Material	Aluminum								
Standard Length	0.98in. (25mm)								
			FTEOSS-ACL <table><tr><td>Name</td><td>Adjustable mounting clip</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>1 in. (25.5mm)</td></tr></table>	Name	Adjustable mounting clip	Material	Aluminum	Standard Length	1 in. (25.5mm)
Name	Adjustable mounting clip								
Material	Aluminum								
Standard Length	1 in. (25.5mm)								

FIT EOS SURFACE

Rigid Fixture · Static White

Drivers

Non-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

FIT EOS SURFACE

Rigid Fixture · Static White

Wiring Diagram

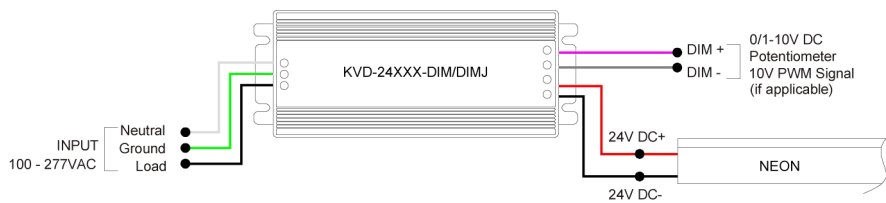
Non-dimmable



Phase cut/Triac-dimmable



4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



FIT EOS SURFACE

Rigid Fixture · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG
5W / 0.2A	1730 ft (527.3 m)	784 ft (238.9 m)	397 ft (121.0 m)	263 ft (80.2 m)	175 ft (53.3 m)	131 ft (39.9 m)	107 ft (32.6 m)
10W / 0.4A	865 ft (263.6 m)	392 ft (119.4 m)	199 ft (60.7 m)	132 ft (40.2 m)	88 ft (26.8 m)	66 ft (20.1 m)	54 ft (16.5 m)
15W / 0.6A	577 ft (175.9 m)	261 ft (79.6 m)	132 ft (40.2 m)	88 ft (26.8 m)	58 ft (17.7 m)	44 ft (13.4 m)	36 ft (11.0 m)
20W / 0.8A	433 ft (132.0 m)	196 ft (59.7 m)	99 ft (30.2 m)	66 ft (20.1 m)	44 ft (13.4 m)	33 ft (10.1 m)	27 ft (8.2 m)
25W / 1.0A	346 ft (105.5 m)	157 ft (47.9 m)	79 ft (24.1 m)	53 ft (16.2 m)	35 ft (10.7 m)	26 ft (7.9 m)	22 ft (6.7 m)
30W / 1.3A	289 ft (88.1 m)	131 ft (39.9 m)	66 ft (20.1 m)	44 ft (13.4 m)	29 ft (8.8 m)	22 ft (6.7 m)	18 ft (5.5 m)
35W / 1.5A	248 ft (75.6 m)	112 ft (34.1 m)	57 ft (17.4 m)	38 ft (11.6 m)	25 ft (7.6 m)	19 ft (5.8 m)	15 ft (4.6 m)
40W / 1.7A	217 ft (66.1 m)	98 ft (29.9 m)	50 ft (15.2 m)	33 ft (10.1 m)	22 ft (6.7 m)	16 ft (4.9 m)	13 ft (4.0 m)
45W / 1.9A	192 ft (58.5 m)	87 ft (26.5 m)	44 ft (13.4 m)	29 ft (8.8 m)	19 ft (5.8 m)	14 ft (4.3 m)	12 ft (3.7 m)
50W / 2.1A	173 ft (52.7 m)	78 ft (23.8 m)	40 ft (12.2 m)	26 ft (7.9 m)	18 ft (5.5 m)	13 ft (4.0 m)	11 ft (3.4 m)
55W / 2.3A	157 ft (47.9 m)	71 ft (21.6 m)	36 ft (11.0 m)	24 ft (7.3 m)	16 ft (4.9 m)	12 ft (3.7 m)	10 ft (3.0 m)
60W / 2.5A	144 ft (43.9 m)	65 ft (19.8 m)	33 ft (10.1 m)	22 ft (6.7 m)	15 ft (4.6 m)	11 ft (3.4 m)	9 ft (2.7 m)
65W / 2.7A	133 ft (40.5 m)	60 ft (18.3 m)	30 ft (9.1 m)	20 ft (6.1 m)	14 ft (4.3 m)	10 ft (3.0 m)	8 ft (2.4 m)
70W / 2.9A	124 ft (37.8 m)	56 ft (17.1 m)	28 ft (8.5 m)	19 ft (5.8 m)	13 ft (4.0 m)	10 ft (3.0 m)	8 ft (2.4 m)
75W / 3.1A	116 ft (35.4 m)	52 ft (15.9 m)	26 ft (7.9 m)	17 ft (5.2 m)	12 ft (3.7 m)	9 ft (2.7 m)	7 ft (2.1 m)
80W / 3.3A	109 ft (33.2 m)	49 ft (14.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	11 ft (3.4 m)	8 ft (2.4 m)	7 ft (2.1 m)
85W / 3.5A	103 ft (31.4 m)	46 ft (14.0 m)	23 ft (7.0 m)	15 ft (4.6 m)	10 ft (3.0 m)	8 ft (2.4 m)	6 ft (1.8 m)
90W / 3.8A	97 ft (29.6 m)	44 ft (13.4 m)	22 ft (6.7 m)	15 ft (4.6 m)	10 ft (3.0 m)	7 ft (2.1 m)	6 ft (1.8 m)
96W / 4.0A	91 ft (27.7 m)	41 ft (12.5 m)	21 ft (6.4 m)	14 ft (4.3 m)	9 ft (2.7 m)	7 ft (2.1 m)	6 ft (1.8 m)