

ARCUS SPEC 3D LARGE (FREE CUT) Indoor · Outdoor · Dual Bending · Static White

Features

- 3D bending design, 1-Step MacAdam, CRI>95, excellent TM-30, with light output up to 275 lm/ft.
- Combo System: Combines Standard cut and Free Cut for precise on-site length customization.
- IP54 /IP67 rated, ideal for indoor/outdoor uses
- 5 years warranty

Applications

Living rooms, TV walls, feature walls, under-cabinet areas, staircases, ceiling coves, hallways, etc.



Date

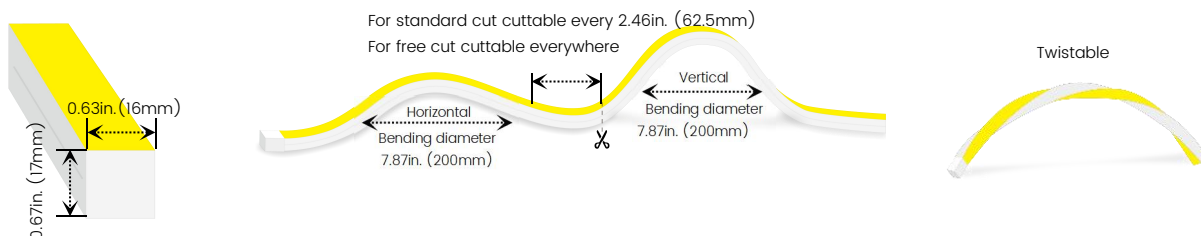
Fixture type

Project name

Project phase



Dimensions



*FT/FO end caps are flush-finished with the strip body.

Order Code

Model	Environment	Voltage	CCT	Power	End Cap	Left Feed Entry
AS3DL	D4-Dry (IP54)	24V-DC24V	27K-2700K	3.0-3.05W/ft	FT Flush translucent	F Front OW Open wire 3.28ft (1m)
AS3DLFC	W7-Wet (IP67)		30K-3000K		FO Flush opaque	B Bottom MC Male connector with 0.98ft (30cm) cable
			35K-3500K			S Side FC Female connector with 0.98ft (30cm) cable
			40K-4000K			C Closed NA Only for Closed Feed Entry

*AS3DLFC: Free Cut delivers precise field-cut lengths for the last segment while keeping in line with standard cut in dimensions, binning, output, and mounting for a uniform appearance.

*Flush translucent and opaque are factory-made only.

Assembly Builder

Assembly Builder

Right Feed Entry				Length	
F	Front	OW	Open wire 3.28ft (1m)	Max. nominal	16.4ft (5m)
B	Bottom	MC	Male connector with 0.98ft (30cm) cable	Increment	2.46in. (62.5mm)
S	Side	FC	Female connector with 0.98ft (30cm) cable	* For ARCUS SPEC 3D LARGE	
C	Closed	NA	Only for Closed Feed Entry		

*We will manufacture to the requested length considering the increment length.

Mounting Order Code

Product Code
Please select on the Mounting Options page.

Lumen Output (lm/ft)


Temp./Color	3.05W/ft
2700K	250
3000K	260
3500K	272
4000K	275
Max. Run for Class 2*	16.4ft (5m)
Max. Run Supported Length	16.4ft (5m)

Technical Details

Efficacy	90.2lm/W @4000K 3.05W
CRI	Ra ≥ 90
Beam Angle	120°
LED MacAdam	1 steps
Average Life (L70)	> 44,000 hours
Storage Temperature	-40~140°F (-40°C~ 60°C)
Operating Temperature	-40~113°F (-40°C~ 45°C)

ARCUS SPEC 3D LARGE (FREE CUT) Indoor · Outdoor · Dual Bending · Static White

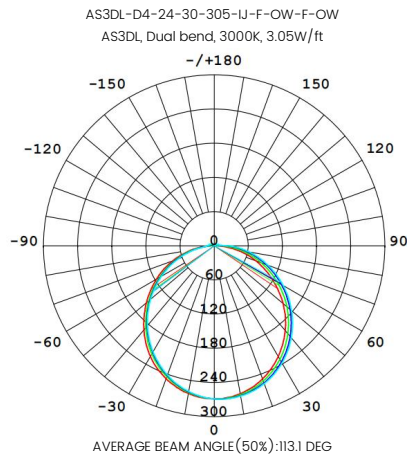
Photometry



Zonal Lumen Summary 3000K


Zone	Lumen	% Fixture
0-30	207.8	25.2%
0-40	339.9	41.2%
0-60	603.2	73.2%
0-90	798.0	96.8%
0-180	824.5	100%

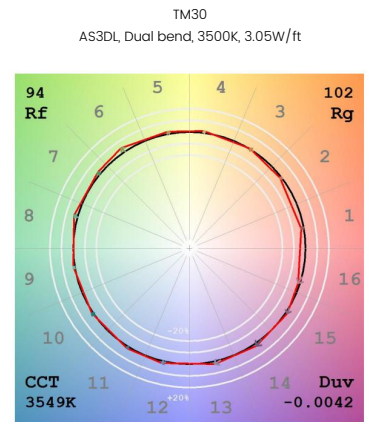UNIT: CD
 — C0/180, 111.6
 — C30/210, 112.6
 — C60/240, 113.9
 — C90/270, 114.4




Feed Entry / End Cap Options

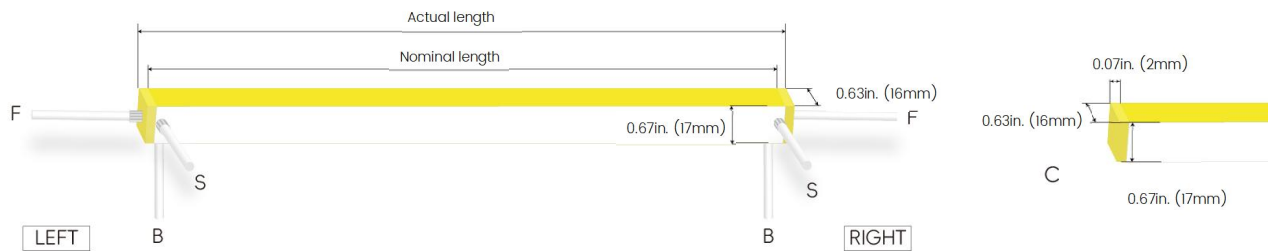
FT: Flush translucent end cap – IP54/IP67, factory-made only



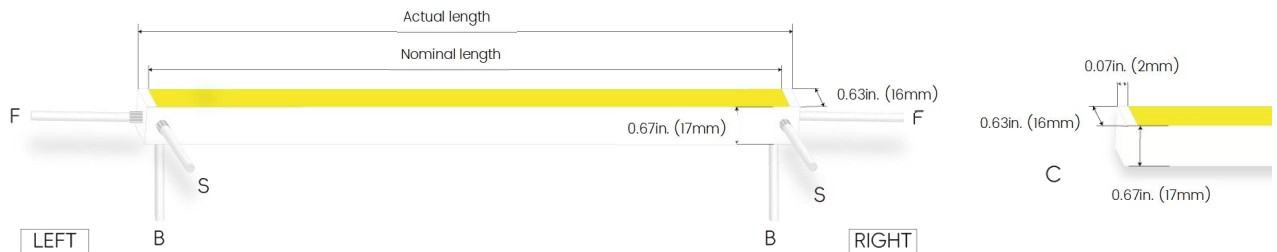FO: Flush Opaque end cap – IP54/IP67, factory-made only



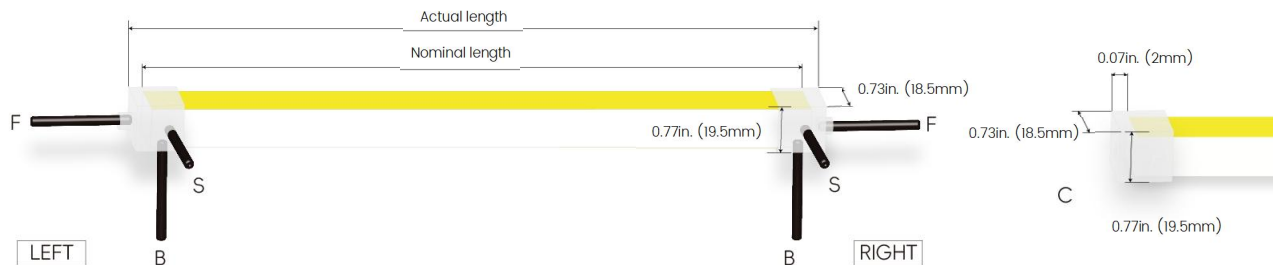SEC: Silicone end cap – IP54/IP67, order separately



ARCUS SPEC 3D LARGE (FREE CUT) Indoor · Outdoor · Dual Bending · Static White

Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 18 AWG (wire length customizable)





MC: Male connector, **Wet**
Standard 0.98ft (30cm), 18 AWG





FC: Female connector, **Wet**
Standard 0.98ft (30cm), 18 AWG



Mounting Options

**ARCUS-L-SC**



Name	Straight surface channel
Material	Aluminum
Standard Length	3.28ft (1M)

**ARCUS-L-BC**



Name	Bendable surface channel
Material	Aluminum
Standard Length	3.28ft (1M)

**ARCUS-L-RC**



Name	Straight recessed channel
Material	Aluminum
Standard Length	3.28ft (1M)

**ARCUS-L-MC**



Name	Mud-in channel
Material	Aluminum
Standard Length	3.28ft (1M)

**ARCUS-L-BMC**



Name	Bendable mud-in channel
Material	Aluminum
Standard Length	3.28ft (1M)

**ARCUS-L-SCS**

Name	Straight surface channel with silicone groove
Material	Aluminum
Standard Length	3.28ft (1M)


**ARCUS-L-LBC**

Name	Light-block channel
Material	Aluminum
Standard Length	3.28ft (1M)

**ARCUS-L-PC**


Name	PC channel
Material	Polycarbonate
Standard Length	3.28ft (1M)

ARCUS SPEC 3D LARGE (FREE CUT) Indoor · Outdoor · Dual Bending · Static White



ARCUS-L-CL


Name	Mounting clip
Material	Aluminum
Standard Length	0.98in. (25mm)



ARCUS-L-LS

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	0.79in. (20mm)



* ARCUS-L-LS can be installed with aluminum channel ARCUS-L-SC.



ARCUS-L-AC

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	1 in. (25.5mm)

* ARCUS-L-LS can be installed with aluminum channel ARCUS-L-SC.



ARCUS-L-RC-SPC

Name	Spring clip
Standard Pkg	1pcs

* ARCUS-L-RC-SPC must be installed with aluminum channel ARCUS-L-RC.

End Caps (Optional, purchase for extra)



ARCUS-L-SEC-C
Silicone closed end cap



ARCUS-L-SEC-F-2P
Silicone end cap front entry with 0.98ft (30cm) cable, 2 pin



ARCUS-L-SEC-S-2P
Silicone end cap side entry with 0.98ft (30cm) cable, 2 pin



ARCUS-L-SEC-B-2P
Silicone end cap bottom entry with 0.98ft (30cm) cable, 2 pin

Additional Accessories (Optional, purchase for extra)



MCW-2P-67
Male connector with 0.98ft (30cm) white cable, 2 pin, IP67, Wet, 18 AWG



FCW-2P-67
Female connector with 0.98ft (30cm) white cable, 2 pin, IP67, Wet, 18 AWG



MCB-2P-67
Male connector with 0.98ft (30cm) black cable, 2 pin, IP67, Wet, 18 AWG



FCB-2P-67
Female connector with 0.98ft (30cm) black cable, 2 pin, IP67, Wet, 18 AWG

ARCUS SPEC 3D LARGE (FREE CUT) Indoor · Outdoor · Dual Bending · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

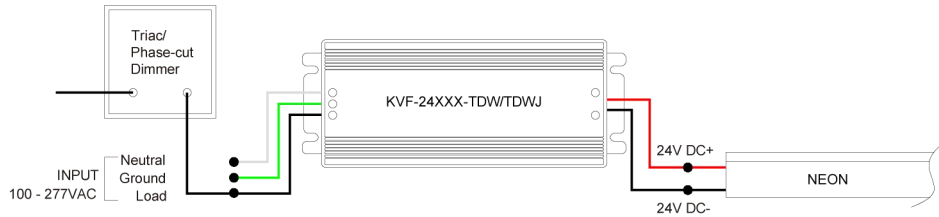
ARCUS SPEC 3D LARGE (FREE CUT) Indoor · Outdoor · Dual Bending · Static White

Wiring Diagram


Non-dimmable



Phase cut/Triac-dimmable



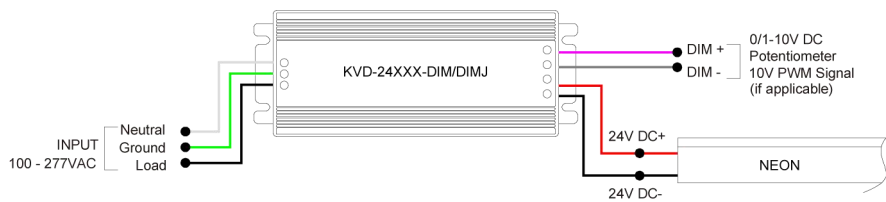4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



ARCUS SPEC 3D LARGE (FREE CUT) Indoor · Outdoor · Dual Bending · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG
5W / 0.2A	1730 ft (527.3 m)	784 ft (238.9 m)	397 ft (121.0 m)	263 ft (80.2 m)	175 ft (53.3 m)	131 ft (39.9 m)	107 ft (32.6 m)
10W / 0.4A	865 ft (263.6 m)	392 ft (119.4 m)	199 ft (60.7 m)	132 ft (40.2 m)	88 ft (26.8 m)	66 ft (20.1 m)	54 ft (16.5 m)
15W / 0.6A	577 ft (175.9 m)	261 ft (79.6 m)	132 ft (40.2 m)	88 ft (26.8 m)	58 ft (17.7 m)	44 ft (13.4 m)	36 ft (11.0 m)
20W / 0.8A	433 ft (132.0 m)	196 ft (59.7 m)	99 ft (30.2 m)	66 ft (20.1 m)	44 ft (13.4 m)	33 ft (10.1 m)	27 ft (8.2 m)
25W / 1.0A	346 ft (105.5 m)	157 ft (47.9 m)	79 ft (24.1 m)	53 ft (16.2 m)	35 ft (10.7 m)	26 ft (7.9 m)	22 ft (6.7 m)
30W / 1.3A	289 ft (88.1 m)	131 ft (39.9 m)	66 ft (20.1 m)	44 ft (13.4 m)	29 ft (8.8 m)	22 ft (6.7 m)	18 ft (5.5 m)
35W / 1.5A	248 ft (75.6 m)	112 ft (34.1 m)	57 ft (17.4 m)	38 ft (11.6 m)	25 ft (7.6 m)	19 ft (5.8 m)	15 ft (4.6 m)
40W / 1.7A	217 ft (66.1 m)	98 ft (29.9 m)	50 ft (15.2 m)	33 ft (10.1 m)	22 ft (6.7 m)	16 ft (4.9 m)	13 ft (4.0 m)
45W / 1.9A	192 ft (58.5 m)	87 ft (26.5 m)	44 ft (13.4 m)	29 ft (8.8 m)	19 ft (5.8 m)	14 ft (4.3 m)	12 ft (3.7 m)
50W / 2.1A	173 ft (52.7 m)	78 ft (23.8 m)	40 ft (12.2 m)	26 ft (7.9 m)	18 ft (5.5 m)	13 ft (4.0 m)	11 ft (3.4 m)
55W / 2.3A	157 ft (47.9 m)	71 ft (21.6 m)	36 ft (11.0 m)	24 ft (7.3 m)	16 ft (4.9 m)	12 ft (3.7 m)	10 ft (3.0 m)
60W / 2.5A	144 ft (43.9 m)	65 ft (19.8 m)	33 ft (10.1 m)	22 ft (6.7 m)	15 ft (4.6 m)	11 ft (3.4 m)	9 ft (2.7 m)
65W / 2.7A	133 ft (40.5 m)	60 ft (18.3 m)	30 ft (9.1 m)	20 ft (6.1 m)	14 ft (4.3 m)	10 ft (3.0 m)	8 ft (2.4 m)
70W / 2.9A	124 ft (37.8 m)	56 ft (17.1 m)	28 ft (8.5 m)	19 ft (5.8 m)	13 ft (4.0 m)	10 ft (3.0 m)	8 ft (2.4 m)
75W / 3.1A	116 ft (35.4 m)	52 ft (15.9 m)	26 ft (7.9 m)	17 ft (5.2 m)	12 ft (3.7 m)	9 ft (2.7 m)	7 ft (2.1 m)
80W / 3.3A	109 ft (33.2 m)	49 ft (14.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	11 ft (3.4 m)	8 ft (2.4 m)	7 ft (2.1 m)
85W / 3.5A	103 ft (31.4 m)	46 ft (14.0 m)	23 ft (7.0 m)	15 ft (4.6 m)	10 ft (3.0 m)	8 ft (2.4 m)	6 ft (1.8 m)
90W / 3.8A	97 ft (29.6 m)	44 ft (13.4 m)	22 ft (6.7 m)	15 ft (4.6 m)	10 ft (3.0 m)	7 ft (2.1 m)	6 ft (1.8 m)
96W / 4.0A	91 ft (27.7 m)	41 ft (12.5 m)	21 ft (6.4 m)	14 ft (4.3 m)	9 ft (2.7 m)	7 ft (2.1 m)	6 ft (1.8 m)