

AERO TAPE DTW Indoor · Dim to Warm

Features

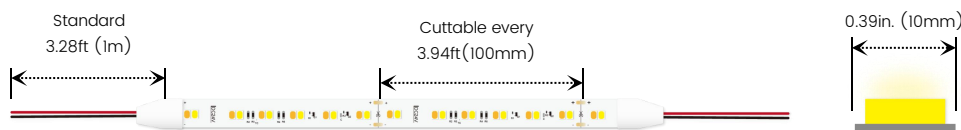
- Standard & popular SMD tape, dim to warm from 1800K to 3500K
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications

Under cabinets, coves, shelves, bedrooms, offices, hallways, etc.



Dimensions



Order Code (For LED tape)

Series	Environment	Voltage	CCT	Power	Left Feed Entry				
AERO	D2-Dry (IP20)	24V-DC24V	DTW18K35K-Dim to Warm	4.4-4.39W/ft	F Front	OW	Open wire 3.28ft (1m), 20 AWG		
					C Closed	MC	Male connector with 0.66ft (20cm) cable, 20 AWG		
						FC	Female connector with 0.66ft (20cm) cable, 20 AWG		
						NA	Only for Closed Feed Entry		

Assembly Builder

Assembly Builder

Right Feed Entry			Length
F Front	OW	Open wire 3.28ft (1m), 20 AWG	Increment 3.94in(100mm)
C Closed	MC	Male connector with 0.66ft (20cm) cable, 20 AWG	
	FC	Female connector with 0.66ft (20cm) cable, 20 AWG	
	NA	Only for Closed Feed Entry	

*For customizations, please inquire.

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page			
S	Silver anodized	OP - Opal	3.28ft (1m)
W	White lacquered	FR - Frosted	6.56ft (2m)
B	Black anodized	CL - Clear	

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/ft)

CCT	4.39W/ft
Dim to Warm 1800K-3500K	347
Max. Run for Class 2*	18.2ft (5.6m)
Max. Run Supported Length	19.7ft (6m)

*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details

Width	0.39in. (10mm)
LED Quantity	36 LEDs/ft (120 LEDs/m)
Beam Angle	120°
Efficacy	79lm/W @ Dim to Warm 1800K-3500K 4.39W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Average Life (L70)	> 54,000 hours
Max. Length Per Reel	164ft (50m)
Storage Temperature	-13-140°F (-20°C- 45°C)
Ambient Temperature	-4-113°F (-20°C- 60°C)

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG
(wire length made to order)



MC: Male connector, **Dry & Damp**
Standard 0.66ft (20cm), 20 AWG



FC: Female connector, **Dry & Damp**
Standard 0.66ft (20cm), 20 AWG

AERO TAPE DTW

Indoor · Dim to Warm

Channel Compatibility

Lens Type & Light Transmission

* Non-standard option, please contact us for customization support.

CL Clear

FR Frosted

OP Opal














Surface			
BEI202 CL 63% FR 58% OP 47% 	BEI205 CL 83% FR 76% OP 62% 	BEI302 CL 84% FR 76% OP 63% 	BEI303 CL 66% FR 61% OP 50%
BEI415 CL 54% FR 51% OP 41% 	BEI919 CL 78% FR 71% OP 58% 	BE2020 CL 80 FR 72% OP 59% 	

Mud-In	
BE5615 CL 59% FR 54% OP 44% 	BE7615 CL 72% FR 66% OP 54%

Recessed			
BEI201 CL 63% FR 58% OP 47% 	BEI204 CL 84% FR 77% OP 63% 	BEI207 CL 62% FR 57% OP 46% 	BE2015 CL 56% FR 51% OP 42%

AERO TAPE DTW

Indoor · Dim to Warm

BE5035 CL 55% FR 50% OP 41% 		BE6575 CL 65% FR 59% OP 49% 	
Corner			
BE1001 CL 86% FR 78% OP 64% 	BE1002 CL 86% FR 79% OP 64% 	BE1101 CL 60% FR 55% OP 45% 	BE1203 CL 76% FR 69% OP 56% 
Suspended			
BE3535 CL 57% FR 52% OP 42% 	BE5075 CL 65% FR 59% OP 48% 	BE60 CL 89% FR 81% OP 66% 	
Specialty			
BE1806 Bendable surface mounted CL 89% FR 81% OP 66% 	BE2009 Coves CL 57% FR 52% OP 43% 	BE3511 Borderless Bi-Color Panel CL 70% FR 64% OP 52% 	BE4615 Borderless Inside Corner CL 60% FR 55% OP 45% 

AERO TAPE DTW

Indoor · Dim to Warm

BE5315 Borderless Outside Corner	BE6728 Staircase	BE7030 Cove Recessed Borderless	BE8833 Cove Recessed / Double-Layer Borderless
CL 59% FR 54% OP 44%	CL 56% FR 51% OP 42%	OP 62%	CL 59% FR 54% OP 44%

Connectors & Additional Accessories (Optional, purchase for extra)



N6012-STCN-2P-10
Strip to cable connector without wire, for 0.39in. (10mm) tape, 2 pin, IP20



N6012-STC-2P-10
Strip to cable connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 2 pin, IP20



N6012-STSJ-2P-10
Strip to strip jumper connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 2 pin, IP20



N6012-STDCB-2P-10
Strip to cable with black male & female connector, for 0.39in. (10mm) tape, 2 pin, IP20



N6012-STDCW-2P-10
Strip to cable with white male & female connector, for 0.39in. (10mm) tape, 2 pin, IP20



N6012-ST5-2P-10
Strip to strip connector, for 0.39in. (10mm) tape, 2 pin, IP20



C6012-LC-2P-10
L-shaped corner connector, for 0.39in. (10mm) tape, 2 pin, IP20



C6012-RC-2P-10
R-shaped corner connector, for 0.39in. (10mm) tape, 2 pin, IP20



MCB-DC-44
Male DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG



FCB-DC-44
Female DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG

AERO TAPE DTW

Indoor · Dim to Warm

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

AERO TAPE DTW


Indoor · Dim to Warm

Wiring Diagram

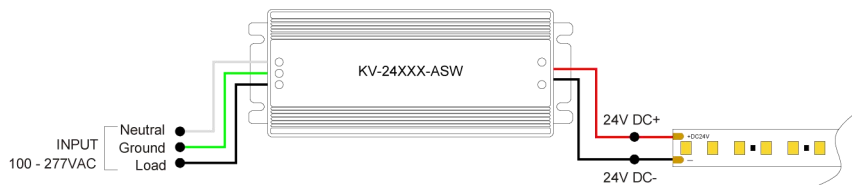Non-dimmable




Phase cut/Triac-dimmable

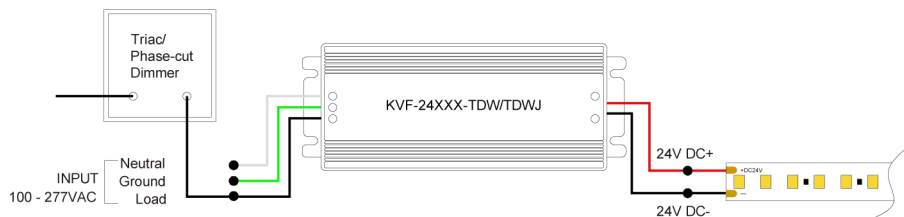

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



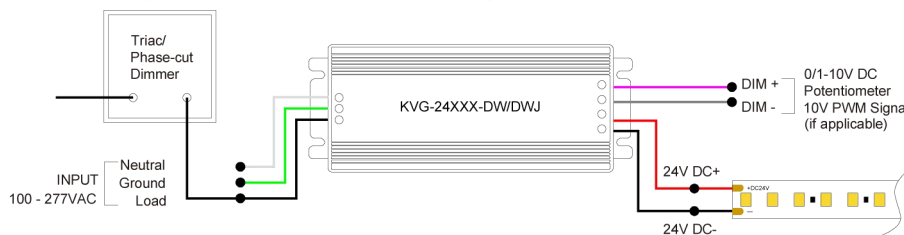5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



AERO TAPE DTW Indoor · Dim to Warm

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total Load	10 AWG	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5W / 0.2A	1730 ft(527.3 m)	1090 ft(332.2 m)	680 ft (207.3 m)	430 ft (131.1 m)	270 ft (82.3 m)	170 ft (51.8 m)	107 ft (32.6 m)	68 ft (20.7 m)
10W / 0.4A	784 ft (239.0 m)	539 ft (164.3 m)	345 ft (105.2 m)	215 ft (65.5 m)	134 ft (40.8 m)	85 ft (25.9 m)	52 ft (15.8 m)	34 ft (10.4 m)
15W / 0.6A	576 ft (175.6 m)	363 ft (110.6 m)	228 ft (69.5 m)	144 ft (43.9 m)	91 ft (27.7 m)	57 ft (17.4 m)	36 ft (11.0 m)	23 ft (7.0 m)
20W / 0.8A	397 ft (121.0 m)	272 ft (82.9 m)	174 ft (53.0 m)	109 ft (33.2 m)	68 ft (20.7 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)
25W / 1.0A	346 ft (105.5 m)	218 ft (66.4 m)	137 ft (41.8 m)	86 ft (26.2 m)	55 ft (16.8 m)	34 ft (10.4 m)	22 ft (6.7 m)	14 ft (4.3 m)
30W / 1.2A	263 ft (80.2 m)	181 ft (55.2 m)	115 ft (35.1 m)	72 ft (21.9 m)	45 ft (13.7 m)	27 ft (8.2 m)	17 ft (5.2 m)	12 ft (3.7 m)
35W / 1.5A	247 ft (75.3 m)	156 ft (47.5 m)	98 ft (29.9 m)	62 ft (18.9 m)	39 ft (11.9 m)	25 ft (7.6 m)	16 ft (4.9 m)	10 ft (3.0 m)
40W / 1.7A	197 ft (60.0 m)	135 ft (41.1 m)	86 ft (26.2 m)	54 ft (16.5 m)	33 ft (10.1 m)	21 ft (6.4 m)	13 ft (4.0 m)	9 ft (2.7 m)
45W / 1.9A	192 ft (58.5 m)	121 ft (36.9 m)	76 ft (23.2 m)	48 ft (14.6 m)	31 ft (9.4 m)	19 ft (5.8 m)	12 ft (3.7 m)	8 ft (2.4 m)
50W / 2.1A	158 ft (48.2 m)	108 ft (32.9 m)	69 ft (21.0 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)	10.5 ft (3.2 m)	7 ft (2.1 m)
60W / 2.5A	131 ft (39.9 m)	90 ft (27.4 m)	57 ft (17.4 m)	36 ft (11.0 m)	22 ft (6.7 m)	14 ft (4.3 m)	9 ft (2.7 m)	6 ft (1.8 m)
70W / 2.9A	112 ft (34.1 m)	77 ft (23.5 m)	49 ft (14.9 m)	31 ft (9.4 m)	19 ft (5.8 m)	12 ft (3.7 m)	7.5 ft (2.3 m)	5 ft (1.5 m)
80W / 3.3A	98 ft (29.9 m)	68 ft (20.7 m)	43 ft (13.1 m)	27 ft (8.2 m)	17 ft (5.2 m)	11 ft (3.4 m)	6.8 ft (2.1 m)	5 ft (1.5 m)
90W / 3.8A	97 ft (29.6 m)	61 ft (18.6 m)	39 ft (11.9 m)	24 ft (7.3 m)	15 ft (4.6 m)	9 ft (2.7 m)	6 ft (1.8 m)	4 ft (1.2 m)
100W / 4.2A	82 ft (25.0 m)	56 ft (17.1 m)	36 ft (11.0 m)	22 ft (6.7 m)	14 ft (4.3 m)	8 ft (2.4 m)	5.3 ft (1.6 m)	4 ft (1.2 m)