

LINIO NEON EOS TV RGB

Vertical Bending · RGB

Features

- Neon & tape in one hybrid design, with changeable RGB colors
- IP65 rated, ideal for damp location and sheltered exterior
- 5 years warranty


Applications

Under cabinets, coves, shelves, closets, millwork, furnitures, etc.

Date	Fixture type
Project name	Project phase



Dimensions

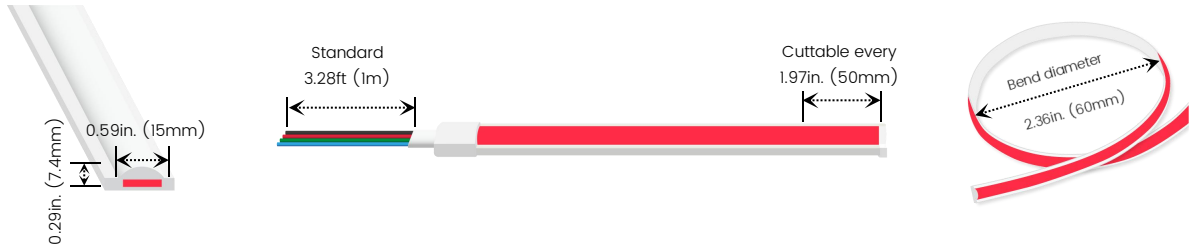

Order Code

Model	Environment	Voltage	Temp./Color	Power	End Cap	Left Feed Entry
LNEOSTV	W5-Wet (IP65)	24-DC24V	RGB-RGB	457~4.57W/ft	IJ IJC SEC	F Front OW Open wire 3.28ft (1m) C Closed NA Only for Closed Feed Entry

Assembly Builder

*Injected and clear injected end cap are factory-made only.

Assembly Builder

Right Feed Entry	Length
F Front OW Open wire 3.28ft (1m) C Closed NA Only for Closed Feed Entry	Max. nominal 16.4ft (5m) Increment 1.97in. (50mm)

Mounting Order Code

Product Code
Please select on the Mounting Options page.

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Lumen Output (lm/ft)	
Temp./Color	4.57W/ft
R	32
G	115
B	21
RGB	160
Max. Run for Class 2	16.4ft (5m)
Max. Run Supported Length	16.4ft (5m)


Technical Details

Efficacy	35.0lm/w @RGB 4.57W
Beam Angle	110°
Average Life(L70)	> 38,000 hours
Storage Temperature	-13~140°F (-25°C~ 60°C)
Operating Temperature	-40~113°F (-40°C~ 45°C)

LINIO NEON EOS TV RGB

Vertical Bending · RGB

Photometry

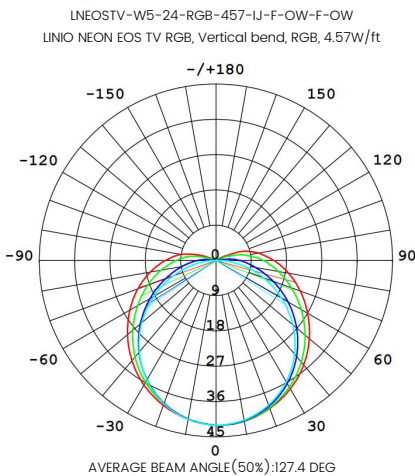


Zonal Lumen Summary RGB

Zone	Lumen	% Fixture
0-30	32.9	20.6%
0-40	54.4	34%
0-60	100.2	62.6
0-90	147.3	92.1%
0-180	160	100%

UNIT: CD
— C0/180, 145.1
— C30/210, 133.4
— C60/240, 117.7
— C90/270, 113.4

Feed Entry / End Cap Options


IJ: Injected end cap – IP65, factory-made only

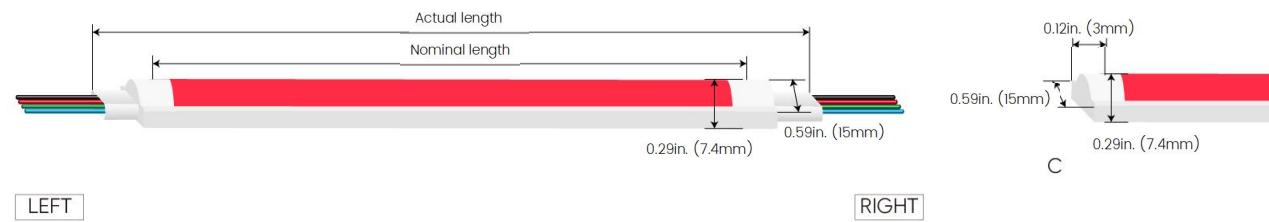

IJC: Clear injected end cap – IP65, factory-made only



SEC: Silicone end cap – IP65

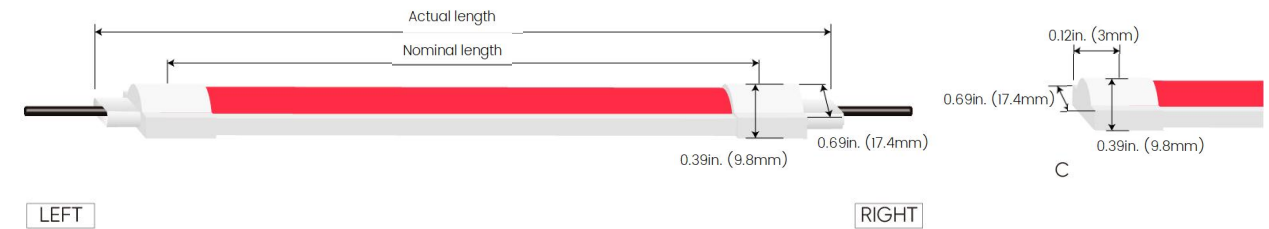

Connector Wire Options







OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG (wire length customizable)

LINIO NEON EOS TV RGB

Vertical Bending · RGB

Mounting Options

			LNEOS-SC-15 <table><tr><td>Name</td><td>Straight surface channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1M)</td></tr></table>	Name	Straight surface channel	Material	Aluminum	Standard Length	3.28ft (1M)
Name	Straight surface channel								
Material	Aluminum								
Standard Length	3.28ft (1M)								
			LNEOS-RC-15 <table><tr><td>Name</td><td>Straight recessed channel</td></tr><tr><td>Material</td><td>Aluminum</td></tr><tr><td>Standard Length</td><td>3.28ft (1M)</td></tr></table>	Name	Straight recessed channel	Material	Aluminum	Standard Length	3.28ft (1M)
Name	Straight recessed channel								
Material	Aluminum								
Standard Length	3.28ft (1M)								
			LNEOS-CL-15 <table><tr><td>Name</td><td>Mounting clip</td></tr><tr><td>Material</td><td>Silicone</td></tr><tr><td>Standard Length</td><td>0.55in. (14mm)</td></tr></table>	Name	Mounting clip	Material	Silicone	Standard Length	0.55in. (14mm)
Name	Mounting clip								
Material	Silicone								
Standard Length	0.55in. (14mm)								

End Caps (Optional, purchase for extra)



LNEOS-SEC-C-15 Silicone closed end cap for 0.59in. (15mm) wide LINIO NEON EOS TV series	LNEOS-SEC-F-4P-15 Silicone end cap front entry with 0.66ft (20cm) cable, 4 pin
---	--

LINIO NEON EOS TV RGB

Vertical Bending · RGB

Drivers

Non-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

DMX-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVX-24100-3C-A	100W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	9.05 x 3.07 x 0.98in. (230 x 78x 25cm)
KVX-24150-3C-A	150W						10.9* x 3.07 x 0.98in. (277 x 78x 25cm)
KVX-24200-3C-A	200W			No			10.9* x 3.07 x 0.98in. (277 x 78x 25cm)
KVX-24300-3C-A	300W						11.85 x 3.07 x 0.98in. (301 x 78x 25cm)



DMX Decoders

Code	Description
LT-903	3 channels output, up to 576W output power
LT-912	12 channels output, up to 1152W output power
LT-924	24 channels output, up to 1728W output power

Controllers

Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-GA2	DMX 512 channels, ready to use (pre-loaded with 8 scenes and 170 RGB fixtures)
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram

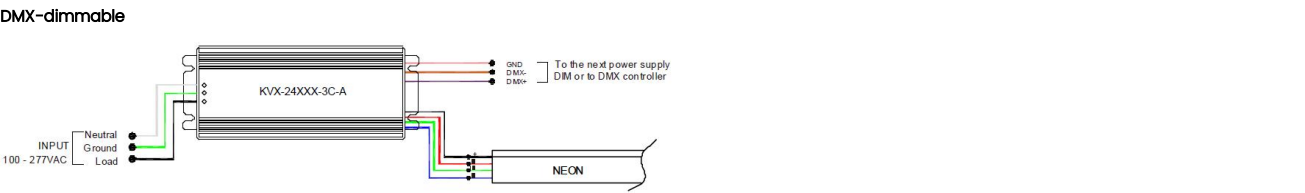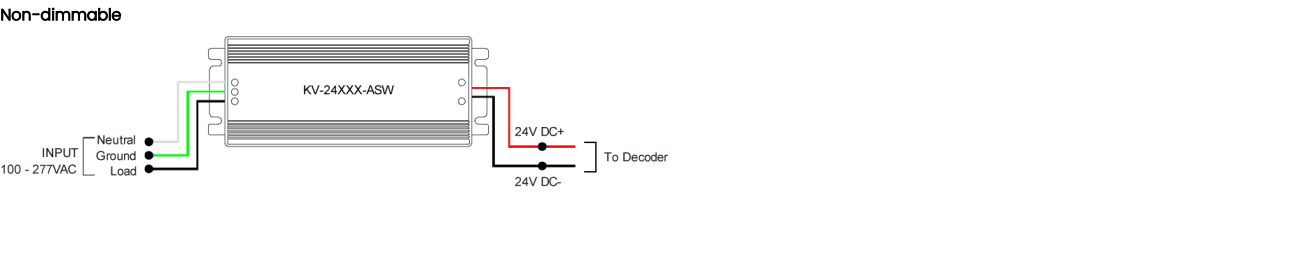

LINIO NEON EOS TV RGB

Vertical Bending · RGB

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)