

LINIO NEON 1617 SPOT Static White

Outdoor · Vertical Bending · Horizontal Bending

Features

- Symmetric optics with 36° beam angle for perfect wall washing lighting
- IP68 rated, ideal for outdoor uses, not for underwater project
- 5 years warranty

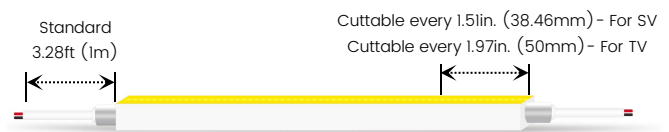

Applications

Front desk, hallways, offices, displays, facades, lobbies, etc.




Date	Fixture type
Project name	Project phase

Dimensions (Vertical Bending · Horizontal Bending)




Bending Directions & Diameters

TV - Top View (Vertical Bending)



*Horizontal bending and 3D bending are prohibited.

SV - Side View (Horizontal Bending)



*Vertical bending and 3D bending are prohibited.

Order Code

Model	Environment	Voltage	CCT	Power	End Cap	Left Feed Entry			
LN1617TVST	W8-Wet (IP68)	24V-DC24V	22K-2200K	549-5.49W/ft	FT	Flush Translucent (IP68)	F	Front	OW
LN1617SVST			27K-2700K	585-5.85W/ft	FO	Flush Opaque (IP68)	B	Bottom	MC
			30K-3000K	670-6.70W/ft			S	Side	FC
			35K-3500K				C	Closed	NA
			40K-4000K						
			50K-5000K						

*LN1617SVST: 5.49W/ft only.
LN1617TVST: Available for 5.85W/ft & 6.70W/ft.

Assembly Builder

Assembly Builder

Right Feed Entry				Length	
F	Front	OW	Open wire 3.28ft (1m)	Max. nominal	16.4ft (5m)
B	Bottom	MC	Male connector with 0.98ft (30cm) cable	*For 5.49W/ft	
S	Side	FC	Female connector with 0.98ft (30cm) cable	Max. nominal	32.8ft (10m)
C	Closed	NA	Only for Closed Feed Entry	*For 5.85W/ft	
				Max. nominal	16.4ft (5m)
				*For 6.70W/ft	

Increment 1.97in. (50mm) - For TV
1.51in. (38.46mm) - For SV

*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Mounting Order Code

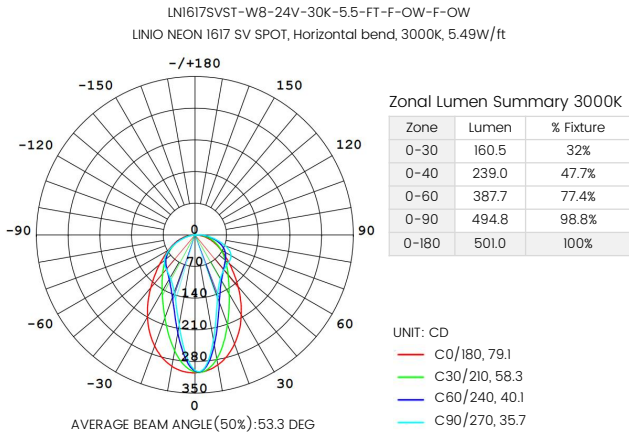
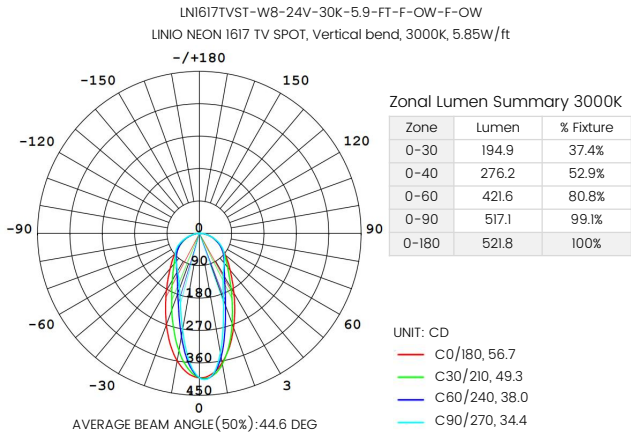
Product Code
Please select on the Mounting Options page.

LINIO NEON 1617 SPOT Static White Outdoor · Vertical Bending · Horizontal Bending

Lumen Output (lm/ft)			
Temp./Color	Vertical Bending		Horizontal Bending
	5.85W/ft	6.70W/ft	5.49W/ft
2200K	/	/	376
2700K	478	496	417
3000K	494	516	436
3500K	502	506	449
4000K	504	526	448
5000K	474	496	441
Max. Run for Class 2*	13.6ft (4.1m)	11.9ft (3.6m)	14.5ft (4.4m)
Max. Run Supported Length	32.8ft (10m)	16.4ft (5m)	16.4ft (5m)
*Typically installations in USA and Canada comply with Class 2 requirements.			

Technical Details		
	Vertical Bending	Horizontal Bending
Efficacy	84 lm/W @3000K 5.85W	79.4 lm/W @3000K 5.49W
CRI	Ra≥90	Ra≥90
Beam Angle	36°x 60°	36°x 80°
LED MacAdam	2 steps	2 steps
IK Rating	IK10	IK09 (With Aluminium Profile)
Average Lifr (L70)	> 42,000 hours	> 40,000 hours
Storage Temperature	-40~149°F (-40°C~ 65°C)	-40~149°F (-40°C~ 65°C)
Operating Temperature	-40~149°F (-40°C~ 65°C)	-40~149°F (-40°C~ 65°C)

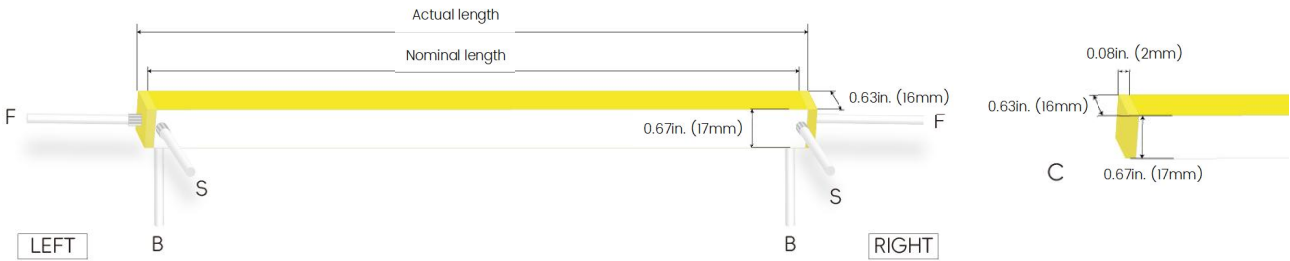
Photometry



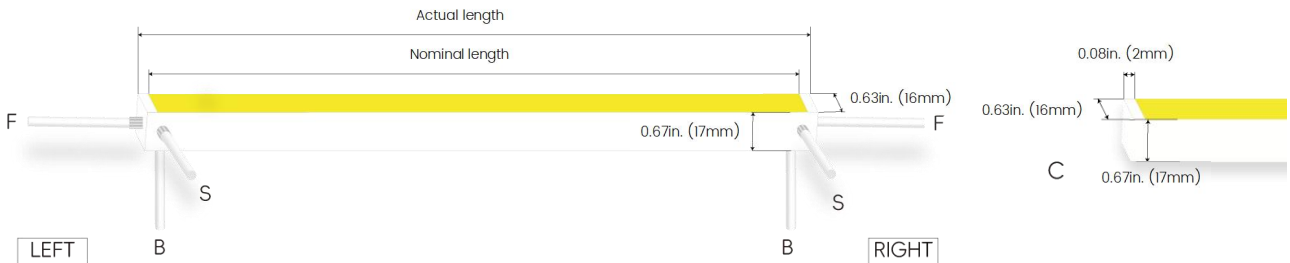
LINIO NEON 1617 SPOT Static White Outdoor · Vertical Bending · Horizontal Bending

Feed Entry / End Cap Options

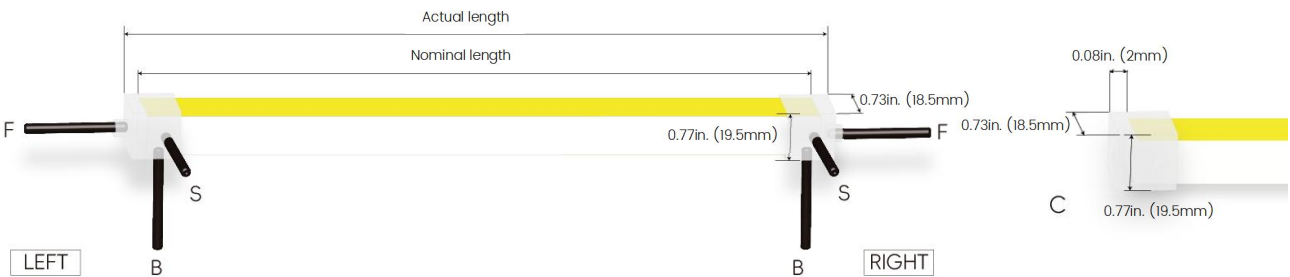
FT: Flush Translucent – IP68, factory-made only



FO: Flush Opaque – IP68, factory-made only



Silicone end cap – IP67



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 18 AWG (wire length customizable)



MC: Male connector, **Wet (IP67)**
Standard 0.98ft (30cm), 18 AWG





FC: Female connector, **Wet (IP67)**
Standard 0.98ft (30cm), 18 AWG




LINIO NEON 1617 SPOT Static White

Outdoor · Vertical Bending · Horizontal Bending



Mounting Options

**LNI617-SC**



Name	Straight surface channel
Material	Aluminum
Standard Length	3.28ft (1M)

**LNI617-BC**



Name	Bendable surface channel
Material	Aluminum
Standard Length	3.28ft (1M)
Min. Bending Radius	600mm

**LNI617-RC**



Name	Straight recessed channel
Material	Aluminum
Standard Length	3.28ft (1M)

**LNI617-MC**



Name	Mud-in channel
Material	Aluminum
Standard Length	3.28ft (1M)
Min. Bending Radius	600mm

**LNI617-BMC**



Name	Bendable mud-in channel
Material	Aluminum
Standard Length	3.28ft (1M)

**LNI617-SCS**


Name	Straight surface channel with silicone groove
Material	Aluminum
Standard Length	3.28ft (1M)

**LNI617-LBC**

Name	Light-block channel
Material	Aluminum
Standard Length	3.28ft (1M)

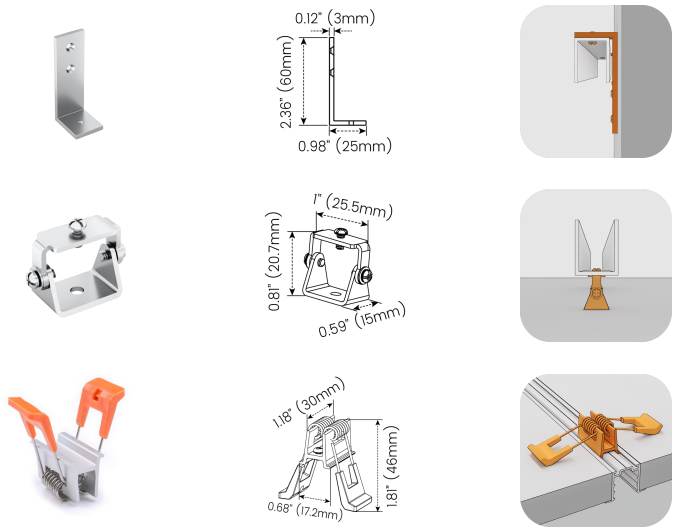
**LNI617-PC**

Name	PC channel
Material	Polycarbonate
Standard Length	3.28ft (1M)

**LNI617-CL**

Name	Mounting clip
Material	Aluminum
Standard Length	0.98in. (25mm)

LINIO NEON 1617 SPOT Static White Outdoor · Vertical Bending · Horizontal Bending

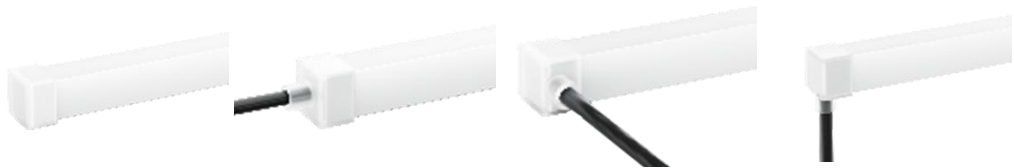


LN1617-LS	
Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	0.79in. (20mm)
* LN1617-LS can be installed with aluminum channel LN1617-SC.	

LN1617-AC	
Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	1 in. (25.5mm)
* LN1617-LS can be installed with aluminum channel LN1617-SC.	

LN1617-RC-SPC	
Name	Spring clip
Standard Pkg	1pcs
* LN1617-RC-SPC must be installed with aluminum channel LN1617-RC.	

End Caps (Optional, purchase for extra)



Additional Accessories (Optional, purchase for extra)



LINIO NEON 1617 SPOT Static White Outdoor · Vertical Bending · Horizontal Bending

Drivers

Non-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

LINIO NEON 1617 SPOT Static White

Outdoor · Vertical Bending · Horizontal Bending

Wiring Diagram

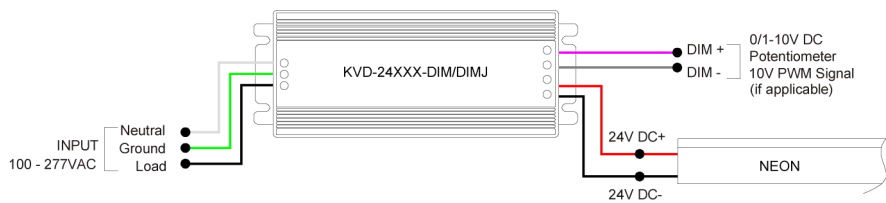
Non-dimmable



Phase cut/Triac-dimmable



4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



LINIO NEON 1617 SPOT Static White Outdoor · Vertical Bending · Horizontal Bending

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)