

LINIO NEON 1617 HE

Outdoor · Vertical Bending · Horizontal Bending · 451lm/ft

Features

- Robust & uniform silicone body, delivering high performance with luminous efficacy up to 102 lm/W and light output up to 451 lm/ft.
- IP68 rated, ideal for outdoor uses, not for underwater project
- 5 years warranty

Applications

Hotels, apartment, lobby hall, shopping mall, facades, gardens, parks, balconies, roofs, soffits, etc.




Date


Fixture type

Project name

Project phase

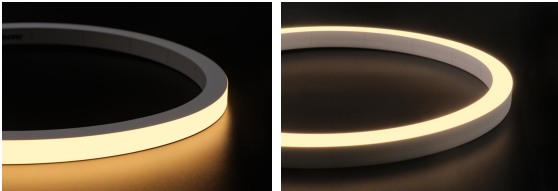


Dimensions (Vertical Bending · Horizontal Bending)



*FT/FO end caps are flush-finished with the strip body.


Bending Directions & Diameters

TV - Top View (Vertical Bending)



*Horizontal bending and 3D bending are prohibited.

SV - Side View (Horizontal Bending)



*Vertical bending and 3D bending are prohibited.

Order Code

Series	Environment	Voltage	CCT	Power	End Cap	Left Feed Entry	
1617TVHE	W8-Wet (IP68)	24V-DC24V	22K~2200k	2.9~2.93W/ft	FT Flush translucent	F Front	OW Open wire 3.28ft (1m)
1617SVHE			27K~2700K	4.6~4.57W/ft	FO Flush opaque	B Bottom	MC Male connector with 0.98ft (30cm) cable
			30K~3000K			S Side	FC Female connector with 0.98ft (30cm) cable
			35K~3500K			C Closed	NA Only for Closed Feed Entry
			40K~4000K				
			57K~5700K				

*Flush translucent and opaque are factory-made only.

Assembly Builder

Assembly Builder

Right Feed Entry				Length	
F Front	OW	Open wire 3.28ft (1m)		Max. nominal	32.8ft (10m)
B Bottom	MC	Male connector with 0.98ft (30cm) cable		Increment	11.8in. (300mm)
S Side	FC	Female connector with 0.98ft (30cm) cable			
C Closed	NA	Only for Closed Feed Entry			

*We will manufacture to the requested length considering the increment length.

Mounting Order Code

Product Code

Please select on the Mounting Options page.

LINIO NEON 1617 HE

Outdoor · Vertical Bending · Horizontal Bending · 451lm/ft

Lumen Output (lm/ft)


Temp./Color	Vertical Bending		Horizontal Bending	
	2.93W/ft	4.57W/ft	2.93W/ft	4.57W/ft
2200K	236	364	186	285
2700K	267	411	209	319
3000K	294	447	228	352
3500K	294	451	231	353
4000K	299	451	239	357
5700K	294	443	228	347
Max. Run for Class 2*	27.3ft (8m)	16.4ft(5m)	27.3ft (8m)	16.4ft(5m)
Max. Run Supported Length	32.8ft(10m)	16.4ft(5m)	32.8ft(10m)	16.4ft(5m)

*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details

	Vertical Bending	Horizontal Bending
Efficacy	102lm/W @4000K	81.5lm/W @4000K
CRI	Ra≥90	Ra≥90
Beam Angle	110°	110°
LED MacAdam	2 steps	2 steps
Average Life (L70)	> 54,000 hours	> 54,000 hours
Storage Temperature	-40-149°F (-40°C~ 65°C)	
Operating Temperature	-40-149°F (-40°C~ 65°C)	

Photometry

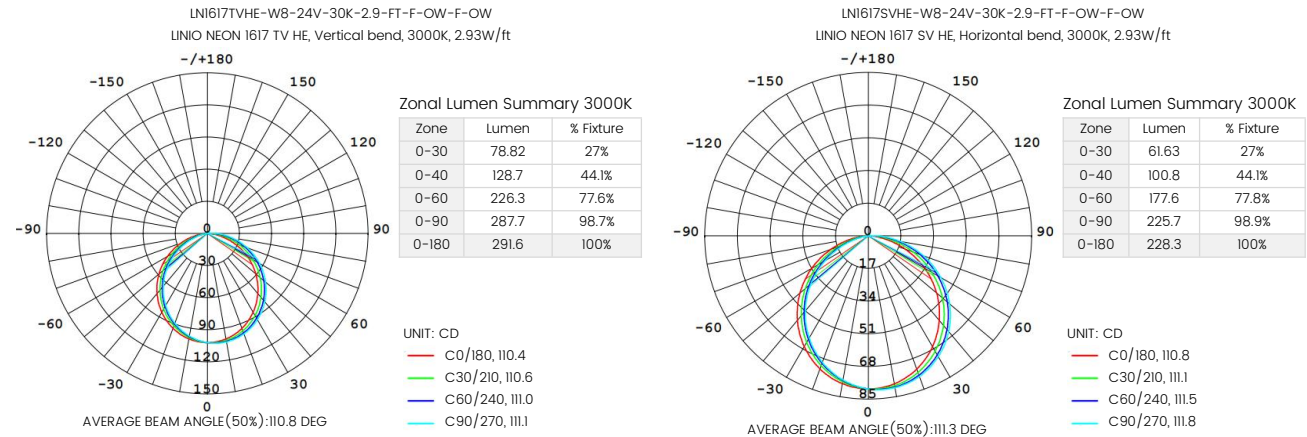


LINIO NEON 1617 HE

Outdoor · Vertical Bending · Horizontal Bending · 451lm/ft

Feed Entry / End Cap Options


FT: Flush Translucent – IP68, factory-made only

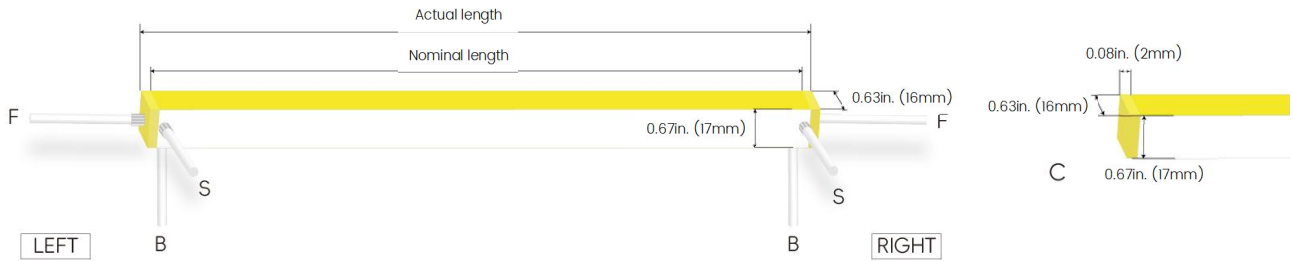


FO: Flush Opaque – IP68, factory-made only



Silicone end cap – IP67

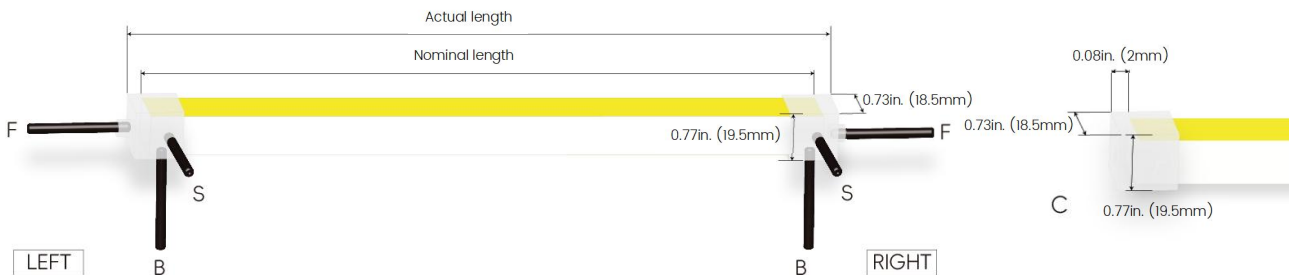

Mechanical end cap with screws – IP67

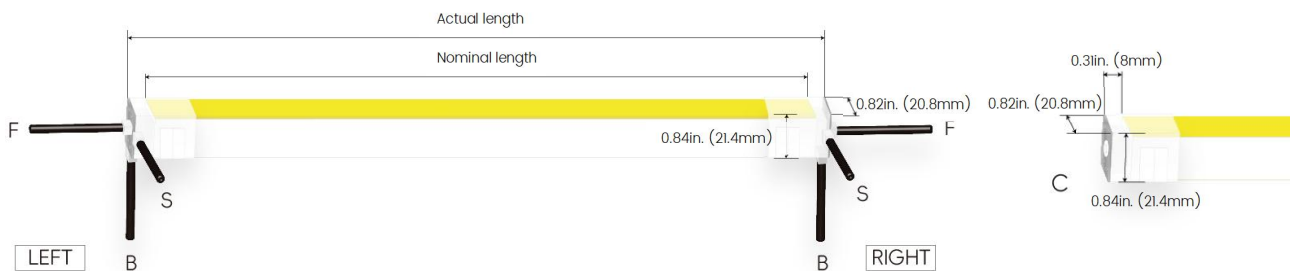

Connector Wire Options



OW: Open wire, **Dry** only
Standard 3.28ft (1m), 18 AWG (wire length customizable)



MC: Male connector, **Wet**
Standard 0.98ft (30cm), 18 AWG





FC: Female connector, **Wet**
Standard 0.98ft (30cm), 18 AWG

LINIO NEON 1617 HE



Outdoor · Vertical Bending · Horizontal Bending · 451lm/ft

Mounting Options





LN1617-SC

Name	Straight surface channel
Material	Aluminum
Standard Length	3.28ft (1M)





LN1617-BC

Name	Bendable surface channel
Material	Aluminum
Standard Length	3.28ft (1M)




LN1617-RC

Name	Straight recessed channel
Material	Aluminum
Standard Length	3.28ft (1M)





LN1617-MC

Name	Mud-in channel
Material	Aluminum
Standard Length	3.28ft (1M)





LN1617-BMC

Name	Bendable mud-in channel
Material	Aluminum
Standard Length	3.28ft (1M)





LN1617-SCS

Name	Straight surface channel with silicone groove
Material	Aluminum
Standard Length	3.28ft (1M)




LN1617-LBC

Name	Light-black channel
Material	Aluminum
Standard Length	3.28ft (1M)



LN1617-PC

Name	PC channel
Material	Polycarbonate
Standard Length	3.28ft (1M)




LN1617-CL

Name	Mounting clip
Material	Aluminum
Standard Length	0.98in. (25mm)

LINIO NEON 1617 HE

Outdoor · Vertical Bending · Horizontal Bending · 451lm/ft

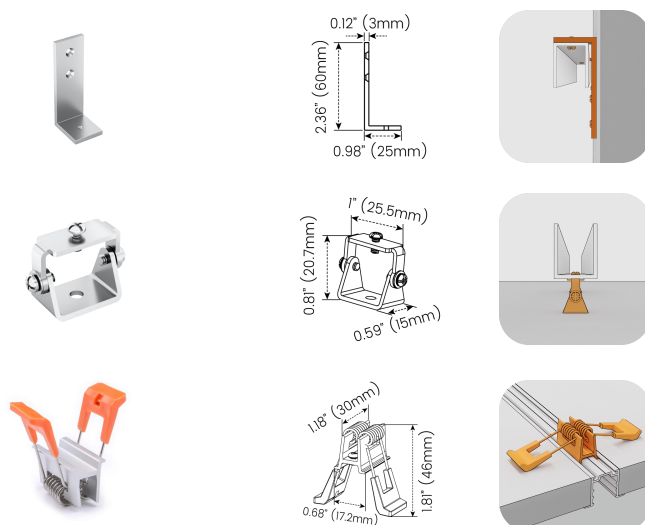

LN1617-LS

Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	0.79in. (20mm)

* LN1617-LS can be installed with aluminum channel LN1617-SC.

LN1617-AC

Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	1 in. (25.5mm)


* LN1617-LS can be installed with aluminum channel LN1617-SC.

LN1617-RC-SPC

Name	Spring clip
Standard Pkg	1pcs

* LN1617-RC-SPC must be installed with aluminum channel LN1617-RC.

End Caps (Optional, purchase for extra)

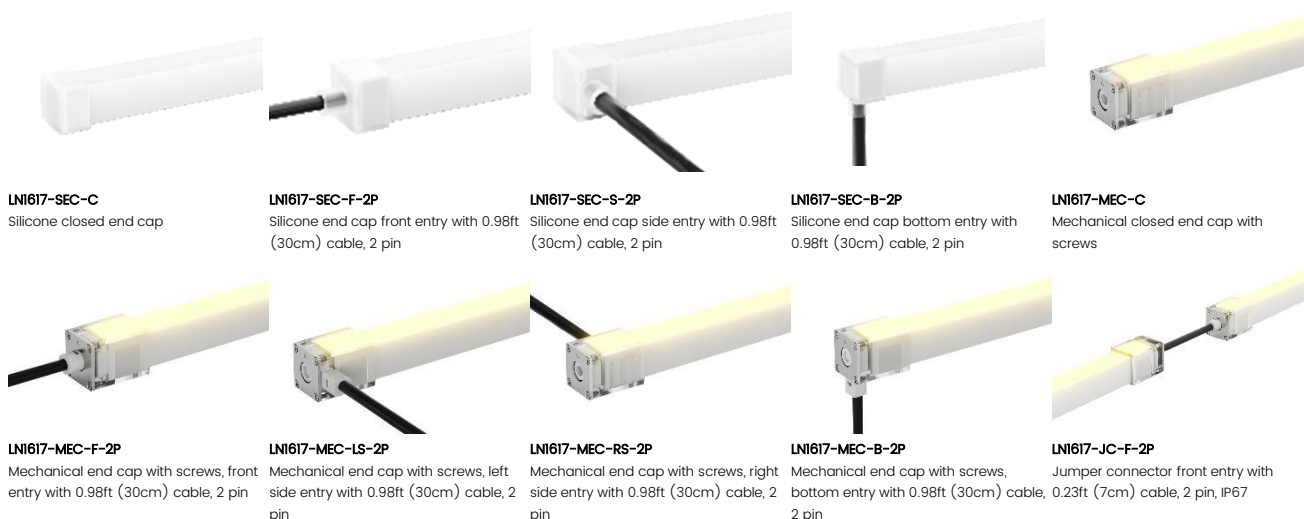

Additional Accessories (Optional, purchase for extra)



MCW-2P-67

Male connector with 0.98ft (30cm) white cable, 2 pin, IP67, Wet, 20 AWG

FCW-2P-67

Female connector with 0.98ft (30cm) white cable, 2 pin, IP67, Wet, 20 AWG

MCB-2P-67

Male connector with 0.98ft (30cm) black cable, 2 pin, IP67, Wet, 20 AWG

FCB-2P-67

Female connector with 0.98ft (30cm) black cable, 2 pin, IP67, Wet, 20 AWG

LINIO NEON 1617 HE

Outdoor · Vertical Bending · Horizontal Bending · 451lm/ft

Drivers

Non-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)							
Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

LINIO NEON 1617 HE

Outdoor · Vertical Bending · Horizontal Bending · 451lm/ft

Wiring Diagram


Non-dimmable



Phase cut/Triac-dimmable



4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

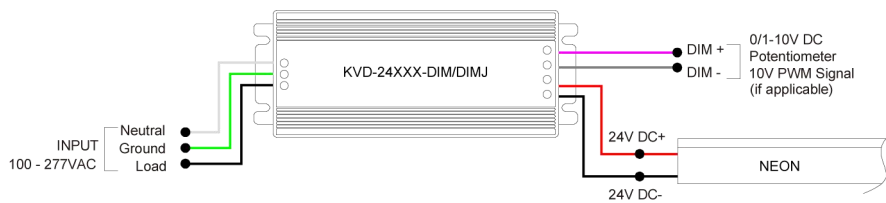

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



LINIO NEON 1617 HE

Outdoor · Vertical Bending · Horizontal Bending · 451lm/ft

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)