

ANNO TAPE DTW Indoor · Dim to Warm

Features

- High-density diode-free COB tape, dim to warm from 1800K to 3500K
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications


Under cabinets, coves, shelves, bedrooms, offices, hallways, etc.



Date	Fixture type
Project name	Project phase



Dimensions

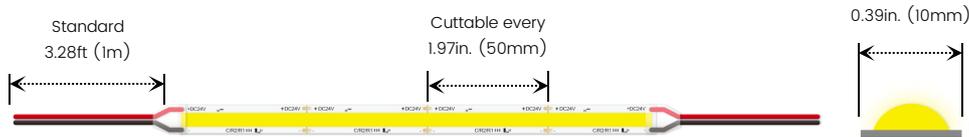

Order Code (For LED tape)

Series	Environment	Voltage	CCT	Power
ANNO	D2-Dry (IP20)	24V-DC24V	DTW18K35K-Dim to Warm 1800K-3500K	3.7-3.66W/ft

Assembly Builder

		Left Feed Entry	
F	Front	OW	Open wire 3.28ft (1m), 20 AWG
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 20 AWG
		FC	Female connector with 0.66ft (20cm) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

		Right Feed Entry	Length
F	Front	OW Open wire 3.28ft (1m), 20 AWG	Increment 1.97in. (50mm)
C	Closed	MC Male connector with 0.66ft (20cm) cable, 20 AWG	
		FC Female connector with 0.66ft (20cm) cable, 20 AWG	
		NA Only for Closed Feed Entry	

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page	<input type="checkbox"/> S = Silver anodized <input type="checkbox"/> W = White lacquered <input type="checkbox"/> B = Black anodized	<input type="checkbox"/> OP - Opal <input type="checkbox"/> FR - Frosted <input type="checkbox"/> CL - Clear	3.28ft (1m) 6.56ft (2m)

*For customizations, please inquire.

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/ft)

CCT	3.66W/ft
Dim to Warm 1800K-3500K	237
Max. Run for Class 2	16.4ft (5m)
Max. Run Supported Length	16.4ft (5m)

*Typically installations in USA and Canada comply with Class 2 requirements.

Technical Details

Width	0.39in. (10mm)
LED Quantity	170 LEDs/ft (560 LEDs/M)
Beam Angle	180°
Efficacy	64.8lm/W @Dim to Warm 1800K-3500K 3.66W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Average Life (L70)	> 54,000 hours
Max. Length Per Reel	98.4' (30M)
Storage Temperature	-13-140°F (-25°C-60°C)
Ambient Temperature	-13-113°F (-25°C-45°C)

Feed Entry Options



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG (wire length made to order)

MC: Male connector, **Dry & Damp**, Standard 0.66ft (20cm), 20 AWG

FC: Female connector, **Dry & Damp**, Standard 0.66ft (20cm), 20 AWG

ANNO TAPE DTW Indoor · Dim to Warm

Channel Compatibility

Lens Type & Light Transmission

* Non-standard option, please contact us for customization support.

CL Clear


FR Frosted

OP Opal

Surface			
<p>BE1202</p> <p>CL 52% FR 47% OP 39%</p>	<p>BE1302</p> <p>CL 74% FR 68% OP 55%</p>	<p>BE1415</p> <p>CL 46% FR 42% OP 34%</p>	<p>BE1919</p> <p>CL 68% FR 62% OP 51%</p>
<p>BE2020</p> <p>CL 66% FR 61% OP 50%</p>	<p>BE2601</p> <p>CL 74% FR 68% OP 55%</p>		

Mud-In	
<p>BE5615</p> <p>CL 50% FR 46% OP 37%</p>	<p>BE7615</p> <p>CL 62% FR 56% OP 46%</p>

ANNO TAPE DTW Indoor · Dim to Warm

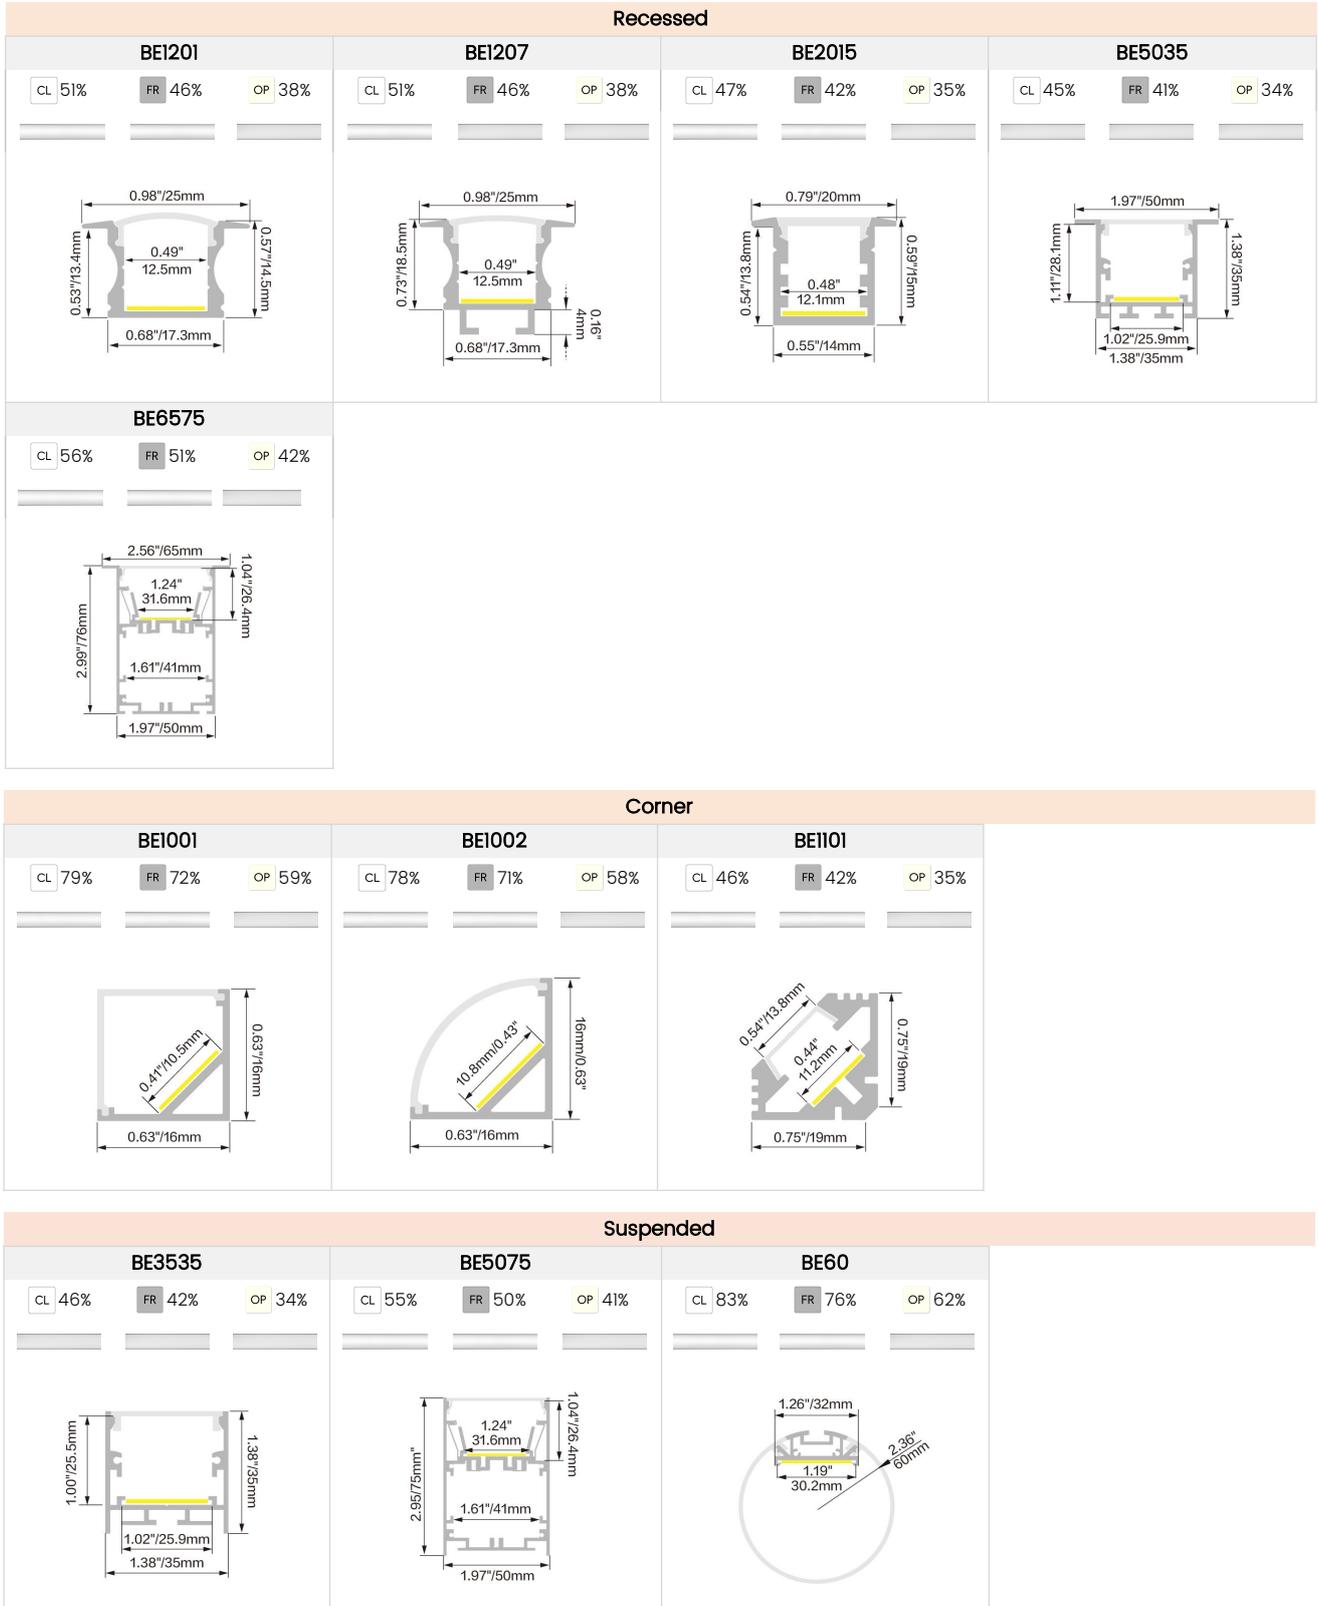

ANNO TAPE DTW Indoor · Dim to Warm

Specialty			
<p>BE1806 Bendable surface mounted</p> <p>CL 81% FR 74% OP 61%</p>	<p>BE2009 Coves</p> <p>CL 48% FR 44% OP 36%</p>	<p>BE4615 Borderless Inside Corner</p> <p>CL 52% FR 48% OP 39%</p>	<p>BE5315 Borderless Outside Corner</p> <p>CL 50% FR 46% OP 38%</p>
<p>BE6728 Staircase</p> <p>CL 44% FR 41% OP 33%</p>	<p>BE7030 Cove Recessed Borderless</p> <p>CL / FR / OP 55%</p>	<p>BE8833 Cove Recessed / Double-Layer Borderless</p> <p>CL 54% FR 49% OP 40%</p>	

ANNO TAPE DTW Indoor · Dim to Warm

Connectors & Additional Accessories (Optional, purchase for extra)



N6012-STCN-2P-10
Strip to cable connector without wire, for 0.39in. (10mm) tape, 2 pin



N6012-STC-2P-10
Strip to cable connector with 5.9in. (15cm) wire, for 0.39in. (10mm) tape, 2 pin



N6012-STSJ-2P-10
Strip to strip jumper connector with 5.9in. (15cm) wire, for 0.39in. (10mm) tape, 2 pin



N6012-STDCB-2P-10
Strip to cable with black male & female connector, for 0.39in. (10mm) tape, 2 pin



N6012-STDCW-2P-10
Strip to cable with white male & female connector, for 0.39in. (10mm) tape, 2 pin



N6012-STS-2P-10
Strip to strip connector, for 0.39in. (10mm) tape, 2 pin



C6012-LC-2P-10
L-shaped corner connector, for 0.39in. (10mm) tape, 2 pin



C6012-RC-2P-10
R-shaped corner connector, for 0.39in. (10mm) tape, 2 pin



MCB-DC-44
Male DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG



FCB-DC-44
Female DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG

ANNO TAPE DTW Indoor · Dim to Warm

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)	
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)	
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)	
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)	
KVF-24030-TDWJ	30W				Yes	Dry/Damp	Yes	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W							7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W							8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)							10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)							11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)							12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)	
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)	
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)	
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)	
KVD-24030-DIMJ	30W				Yes	Dry/Damp	Yes	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W							7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W							8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)							10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)							11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)							12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)


5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)	
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)	
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)	
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)	
KVG-24030-DWJ	30W				Yes	Dry/Damp	Yes	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W							7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W							8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)							10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)							11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)							12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)


ANNO TAPE DTW Indoor · Dim to Warm

Wiring Diagram


Non-dimmable

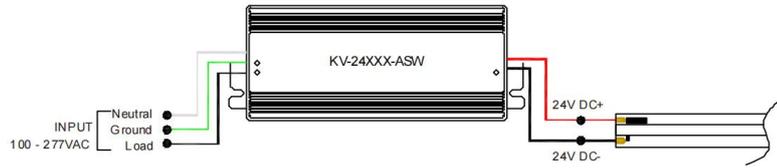


Phase cut/Triac-dimmable

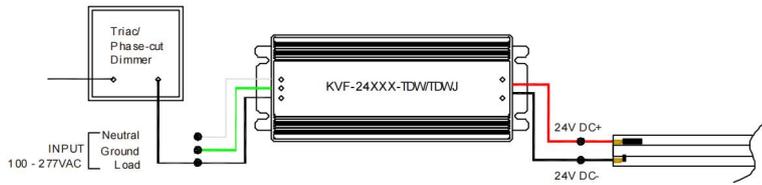

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

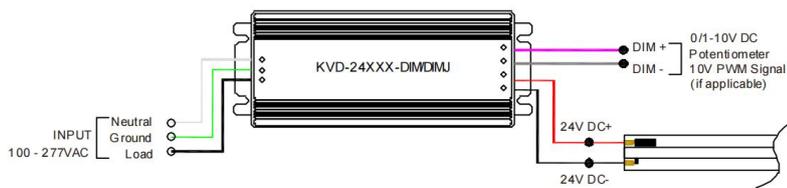

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

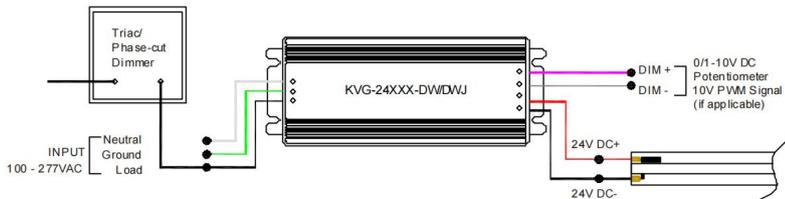

ANNO TAPE DTW Indoor · Dim to Warm

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)