

ANNO TAPE TW Indoor · Tunable White

Features

- High-density diode-free COB tape, tunable white from 2700K to 6500K
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications


Under cabinets, coves, shelves, bedrooms, offices, hallways, etc.



Date	Fixture type
Project name	Project phase



Dimensions

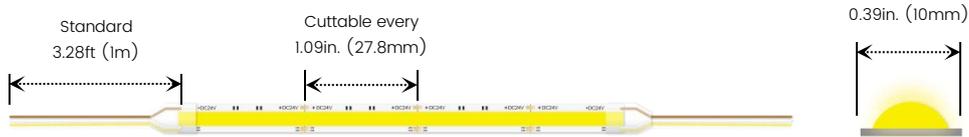

Order Code (For LED tape)

Series	Environment	Voltage	CCT	Power
ANNO	D2-Dry (IP20)	24V-DC24V	27K65K-2700K+6500K	4.6-4.57W/ft

Assembly Builder

		Left Feed Entry	
F	Front	OW	Open wire 3.28ft (1m), 20 AWG
C	Closed	MC	Male connector with 0.98ft (30cm) cable, 20 AWG
		FC	Female connector with 0.98ft (30cm) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

		Right Feed Entry		Length	
F	Front	OW	Open wire 3.28ft (1m), 20 AWG	Max.	16.4ft (5m)
C	Closed	MC	Male connector with 0.98ft (30cm) cable, 20 AWG	Increment	1.09in. (27.8mm)
		FC	Female connector with 0.98ft (30cm) cable, 20 AWG		
		NA	Only for Closed Feed Entry		

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page	<input type="checkbox"/> S = Silver anodized <input type="checkbox"/> W = White lacquered <input type="checkbox"/> B = Black anodized	<input type="checkbox"/> OP - Opal <input type="checkbox"/> FR - Frosted <input type="checkbox"/> CL - Clear	3.28ft (1m) 6.56ft (2m)

*For customizations, please inquire.

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/ft)

CCT	4.57W/ft
2700K	196
6500K	248
2700K+6500K	428
Max. Run for Class 2	16.4ft (5m)
Max. Run Supported Length	16.4ft (5m)

*Typically installations in USA and Canada comply with Class 2 requirements.


Technical Details

Width	0.39in. (10mm)
LED Quantity	175 LEDs/ft (576 LEDs/M)
Beam Angle	180°
Efficacy	93.7lm/W @2700K+6500K 4.57W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Average Life (L70)	> 54,000 hours
Max. Length Per Reel	98.4' (30M)
Storage Temperature	-13-140°F (-25°C-60°C)
Ambient Temperature	-13-113°F (-25°C-45°C)

Feed Entry Options



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG
(wire length made to order)

MC: Male connector, **Dry & Damp.**
Standard 0.98ft (30cm), 20 AWG

FC: Female connector, **Dry & Damp.**
Standard 0.98ft (30cm), 20 AWG

ANNO TAPE TW

Indoor · Tunable White

Channel Compatibility

Lens Type & Light Transmission

* Non-standard option, please contact us for customization support.

CL Clear

FR Frosted

OP Opal

Surface			
<p>BE1202</p> <p>CL 52% FR 47% OP 39%</p>	<p>BE1302</p> <p>CL 72% FR 65% OP 53%</p>	<p>BE1415</p> <p>CL 44% FR 40% OP 33%</p>	<p>BE1919</p> <p>CL 66% FR 60% OP 49%</p>
<p>BE2020</p> <p>CL 66% FR 60% OP 49%</p>	<p>BE2601</p> <p>CL 71% FR 65% OP 53%</p>		

Mud-In	
<p>BE5615</p> <p>CL 48% FR 44% OP 36%</p>	<p>BE7615</p> <p>CL 59% FR 54% OP 44%</p>

ANNO TAPE TW

Indoor · Tunable White

Recessed			
<p>BE1201</p> <p>CL 50% FR 46% OP 38%</p>	<p>BE1207</p> <p>CL 51% FR 47% OP 38%</p>	<p>BE2015</p> <p>CL 46% FR 42% OP 34%</p>	<p>BE5035</p> <p>CL 43% FR 39% OP 32%</p>
<p>BE6575</p> <p>CL 54% FR 49% OP 40%</p>			
Corner			
<p>BE1001</p> <p>CL 76% FR 70% OP 57%</p>	<p>BE1002</p> <p>CL 76% FR 70% OP 57%</p>	<p>BE1101</p> <p>CL 47% FR 43% OP 35%</p>	
Suspended			
<p>BE3535</p> <p>CL 46% FR 42% OP 34%</p>	<p>BE5075</p> <p>CL 54% FR 49% OP 40%</p>	<p>BE60</p> <p>CL 80% FR 73% OP 59%</p>	

ANNO TAPE TW

Indoor · Tunable White

Specialty			
<p>BE1806 Bendable surface mounted</p> <p>CL 78% FR 71% OP 58%</p>	<p>BE2009 Coves</p> <p>CL 47% FR 43% OP 35%</p>	<p>BE4615 Borderless Inside Corner</p> <p>CL 50% FR 46% OP 38%</p>	<p>BE5315 Borderless Outside Corner</p> <p>CL 47% FR 43% OP 35%</p>
<p>BE6728 Staircase</p> <p>CL 45% FR 41% OP 33%</p>	<p>BE7030 Cove Recessed Borderless</p> <p>OP 49%</p>	<p>BE8833 Cove Recessed / Double-Layer Borderless</p> <p>CL 50% FR 46% OP 38%</p>	

Connectors & Additional Accessories (Optional, purchase for extra)

<p>N6012-STCN-2P-10 Strip to cable connector without wire, for 0.39in. (10mm) tape, 2 pin, IP20</p>	<p>N6012-STC-2P-10 Strip to cable connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 2 pin, IP20</p>	<p>N6012-STSJ-2P-10 Strip to strip jumper connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 2 pin, IP20</p>	<p>N6012-STDCB-2P-10 Strip to cable with black male & female connector, for 0.39in. (10mm) tape, 2 pin, IP20</p>	<p>N6012-STDCW-2P-10 Strip to cable with white male & female connector, for 0.39in. (10mm) tape, 2 pin, IP20</p>
<p>N6012-ST5-2P-10 Strip to strip connector, for 0.39in. (10mm) tape, 2 pin, IP20</p>	<p>C6012-LC-2P-10 L-shaped corner connector, for 0.39in. (10mm) tape, 2 pin, IP20</p>	<p>C6012-RC-2P-10 R-shaped corner connector, for 0.39in. (10mm) tape, 2 pin, IP20</p>	<p>MCB-DC-44 Male DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG</p>	<p>FCB-DC-44 Female DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG</p>

ANNO TAPE TW

Indoor · Tunable White


Drivers

0-10V dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
LM-100-24-U2A2	100W	100-277VAC	24V	Yes	No	Dry	13.86 x 1.69 x 1.18in. (35.2x 4.3 x 3cm)

Wiring Diagram

0-10V-dimmable

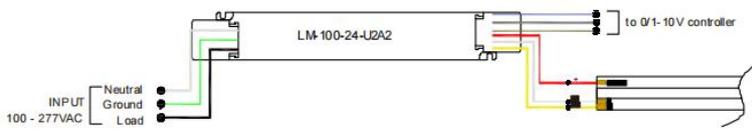

ANNO TAPE TW Indoor · Tunable White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)