

ANNO TAPE COLORS

Indoor · COLORS

Features

- High-density diode-free COB tape, with various monochromatic color options
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications

Under cabinets, coves, theme parks, bedrooms, studios, etc.




Date _____ Fixture type _____

Project name _____ Project phase _____



Dimensions

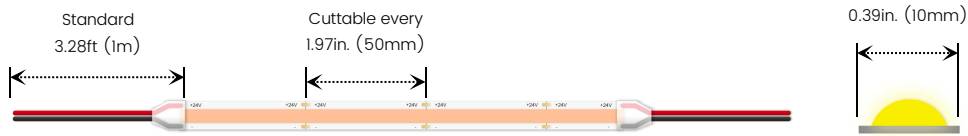

Order Code (For LED tape)

Series	Environment	Voltage	Temp./Color	Power
ANNO	D2-Dry (IP20)	24V-DC24V	R-Red G-Green B-Blue A-Amber P-Purple Y-Yellow PK-Pink	3.1-3.05W/ft

Assembly Builder

		Left Feed Entry	
F	Front	OW	Open wire 3.28ft (1m), 20 AWG
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 20 AWG
		FC	Female connector with 0.66ft (20cm) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

		Right Feed Entry	Length
F	Front	OW Open wire 3.28ft (1m), 20 AWG	Max 16.4ft (5m)
C	Closed	MC Male connector with 0.66ft (20cm) cable, 20 AWG	Increment 1.97in. (50mm)
		FC Female connector with 0.66ft (20cm) cable, 20 AWG	
		NA Only for Closed Feed Entry	

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page	S = Silver anodized W = White lacquered B = Black anodized	OP - Opal FR - Frosted CL - Clear	3.28ft (1m) 6.56ft (2m)

*For customizations, please inquire.

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/ft)

Temp./Color	3.05W/ft
Red	55
Green	345
Blue	66
Amber	76
Purple	170
Yellow	151
Pink	210
Max. Run for Class 2*	26.2ft (8m)
Max. Run Supported Length	32.8ft (10m)

*Typically installations in USA and Canada comply with Class 2 requirements.


Technical Details

Width	0.39in. (10mm)
LED Quantity	146 LEDs/ft (480 LEDs/M)
Beam Angle	180°
Efficacy	18lm/w @Red 3.05W
Average Life (L70)	> 54,000 hours
Max. Length Per Reel	98.4ft (30m)
Storage Temperature	-4-113°F (-20°C- 60°C)
Ambient Temperature	-13-140°F (-20°C- 45°C)

Feed Entry Options



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG
(wire length made to order)

MC: Male connector, **Dry & Damp**. **FC:** Female connector, **Dry & Damp**.
Standard 0.66ft (20cm), 20 AWG
Standard 0.66ft (20cm), 20 AWG

ANNO TAPE COLORS

Indoor · COLORS

Channel Compatibility

Lens Type & Light Transmission

* Non-standard option, please contact us for customization support.

CL Clear

FR Frosted

OP Opal

Surface			
<p>BE1202</p> <p>CL 51% FR 47% OP 38%</p>	<p>BE1302</p> <p>CL 70% FR 64% OP 53%</p>	<p>BE1415</p> <p>CL 44% FR 40% OP 33%</p>	<p>BE1919</p> <p>CL 65% FR 60% OP 49%</p>
<p>BE2020</p> <p>CL 64% FR 58% OP 48%</p>	<p>BE2601</p> <p>CL 73% FR 67% OP 55%</p>		

Mud-In	
<p>BE5615</p> <p>CL 49% FR 45% OP 37%</p>	<p>BE7615</p> <p>CL 60% FR 55% OP 45%</p>

ANNO TAPE COLORS

Indoor · COLORS












Recessed			
<p>BE1201</p> <p>CL 50% FR 46% OP 38%</p>	<p>BE1207</p> <p>CL 50% FR 46% OP 37%</p>	<p>BE2015</p> <p>CL 45% FR 41% OP 34%</p>	<p>BE5035</p> <p>CL 54% FR 49% OP 40%</p>
<p>BE6575</p> <p>CL 55% FR 50% OP 41%</p>			
Corner			
<p>BE1001</p> <p>CL 77% FR 70% OP 57%</p>	<p>BE1002</p> <p>CL 76% FR 69% OP 57%</p>	<p>BE1101</p> <p>CL 49% FR 44% OP 36%</p>	
Suspended			
<p>BE5075</p> <p>CL 55% FR 50% OP 41%</p>	<p>BE60</p> <p>CL 80% FR 73% OP 60%</p>	<p>BE3535</p> <p>CL 46% FR 42% OP 35%</p>	

ANNO TAPE COLORS

Indoor · COLORS

Specialty			
<p>BE1806 Bendable surface mounted</p> <p>CL 77% FR 70% OP 57%</p>	<p>BE2009 Coves</p> <p>CL 49% FR 45% OP 36%</p>	<p>BE4615 Borderless Inside Corner</p> <p>CL 51% FR 46% OP 38%</p>	<p>BE5315 Borderless Outside Corner</p> <p>CL 49% FR 45% OP 31%</p>
<p>BE6728 Staircase</p> <p>CL 45% FR 41% OP 34%</p>	<p>BE8833 Cove Recessed / Double-Layer Borderless</p> <p>CL 52% FR 48% OP 39%</p>		

Connectors & Additional Accessories (Optional, purchase for extra)

 <p>N14CO-STCN-2P-10 Strip to cable connector without wire, for 0.39in. (10mm) tape, 2 pin</p>	 <p>N14CO-STC-2P-10 Strip to cable connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 2 pin</p>	 <p>N14CO-STSJ-2P-10 Strip to strip jumper connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 2 pin</p>	 <p>N14CO-STDCB-2P-10 Strip to cable with black female connector, for 0.39in. (10mm) tape, 2 pin</p>	 <p>N14CO-STDCW-2P-10 Strip to cable with white female connector, for 0.39in. (10mm) tape, 2 pin</p>
 <p>N14CO-STS-2P-10 Strip to strip connector, for 0.39in. (10mm) tape, 2 pin</p>	 <p>C14CO-LC-2P-10 L-shaped corner connector, for 0.39in. (10mm) tape, 2 pin</p>	 <p>C14CO-RC-2P-10 R-shaped corner connector, for 0.39in. (10mm) tape, 2 pin</p>	 <p>N16CO-L-2P-10 L-shaped connector, for 0.39in. (10mm) tape, 2 pin</p>	 <p>MCB-DC-44 Male DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG</p>
 <p>FCB-DC-44 Female DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG</p>				

ANNO TAPE COLORS

Indoor · COLORS

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVF-24030-TDWJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVD-24030-DIMJ	30W				Yes	Dry/Damp	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W						7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)						12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)
KVG-24030-DWJ	30W				Yes	Dry/Damp	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W						7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W						8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)						10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)						11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)						12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

ANNO TAPE COLORS


Indoor · COLORS

Wiring Diagram

Non-dimmable



Phase cut/Triac-dimmable

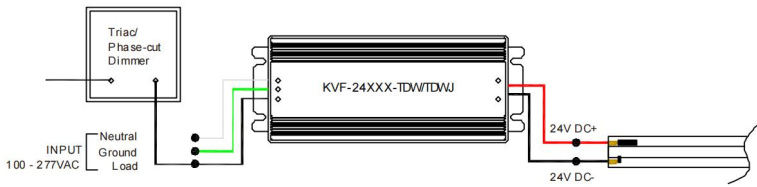

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)



5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



ANNO TAPE COLORS

Indoor · COLORS

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)