

ANNO TAPE LONG RUN

Indoor · Static White

Features

- Long max run length up to 65.6ft (20m) from single power feed
- IP20 rated, ideal for indoor non-condensing uses
- 5 years warranty

Applications


Under cabinets, coves, shelves, bedrooms, offices, hallways, etc.



Date	Fixture type
Project name	Project phase



Dimensions

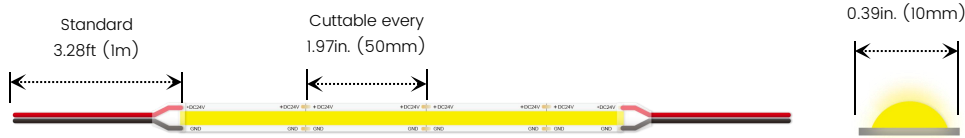

Order Code (For LED tape)

Series	Environment	Voltage	CCT	Power
ANNLR	D2-Dry (IP20)	24V-DC24V	27K-2700K 30K-3000K 35K-3500K 40K-4000K	2.1-2.13W/ft

Assembly Builder

		Left Feed Entry	
F	Front	OW	Open wire 3.28ft (1m), 20 AWG
C	Closed	MC	Male connector with 0.66ft (20cm) cable, 20 AWG
		FC	Female connector with 0.66ft (20cm) cable, 20 AWG
		NA	Only for Closed Feed Entry

Assembly Builder

		Right Feed Entry	Length
F	Front	OW Open wire 3.28ft (1m), 20 AWG	Max. 65.6ft (20m)
C	Closed	MC Male connector with 0.66ft (20cm) cable, 20 AWG	Increment 1.97in.(50mm)
		FC Female connector with 0.66ft (20cm) cable, 20 AWG	
		NA Only for Closed Feed Entry	

*For customizations, please inquire.

Extrusion Order Code

Product Code	Colors	Lens	Lengths
Please select on the Extrusion Compatibility page	■ S = Silver anodized	OP - Opal	3.28ft (1m)
	□ W = White lacquered	FR - Frosted	6.56ft (2m)
	■ B = Black anodized	CL - Clear	

*For custom RAL colors, please inquire.

*Extrusions are sold separately. Refer to corresponding spec sheets for ordering info on extrusions and their accessories (endcaps, mounting brackets, etc.)

Lumen Output (lm/ft)

CCT	2.13W/ft
2700K	149
3000K	160
3500K	180
4000K	181
Max. Run for Class 2*	37.6ft (11.5m)
Max. Run Supported Length	65.6ft (20m)

*Typically installations in USA and Canada comply with Class 2 requirements.


Technical Details

Width	0.39in. (10mm)
LED Quantity	97 LEDs/ft (360 LEDs/M)
Beam Angle	180°
Efficacy	85lm/W @4000K 2.13W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Average Life (L70)	> 54,000 hours
Max. Length Per Reel	98.4ft (30m)
Storage Temperature	-13-140°F (-25°C-60°C)
Ambient Temperature	-13-113°F (-25°C-45°C)

Feed Entry Options



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28ft (1m), 20 AWG
(wire length made to order)

MC: Male connector, **Dry & Damp**. **FC:** Female connector, **Dry & Damp**
Standard 0.66ft (20cm), 20 AWG
Standard 0.66ft (20cm), 20 AWG

ANNO TAPE LONG RUN

Indoor · Static White

Channel Compatibility

Lens Type & Light Transmission

* Non-standard option, please contact us for customization support.

CL Clear

FR Frosted




OP Opal

Surface			
<p>BE1202</p> <p>CL 52% FR 47% OP 39%</p>	<p>BE1302</p> <p>CL 70% FR 64% OP 52%</p>	<p>BE1919</p> <p>CL 64% FR 59% OP 48%</p>	<p>BE2020</p> <p>CL 64% FR 58% OP 48%</p>
<p>BE2601</p> <p>CL 70% FR 64% OP 52%</p>			

Mud-In	
<p>BE5615</p> <p>CL 48% FR 44% OP 36%</p>	<p>BE7615</p> <p>CL 60% FR 55% OP 45%</p>

ANNO TAPE LONG RUN

Indoor · Static White

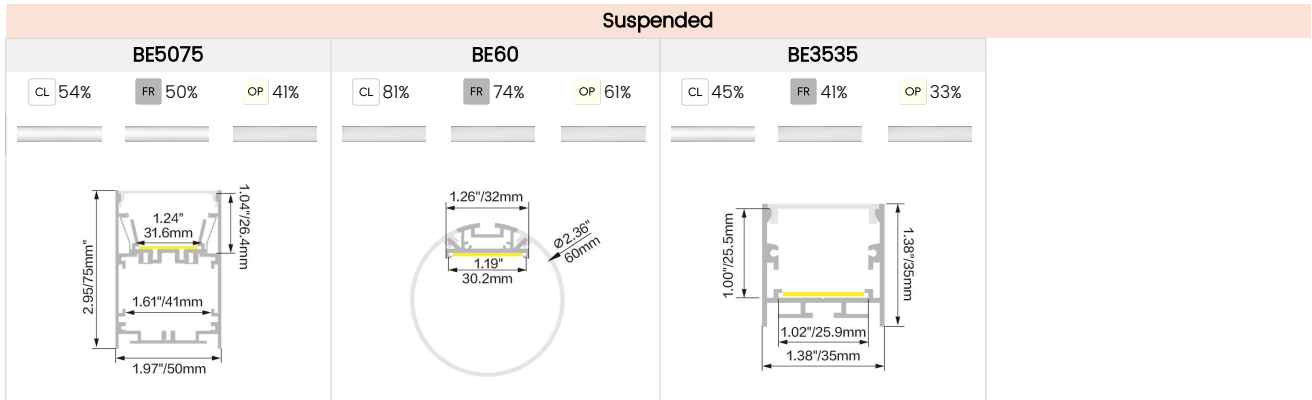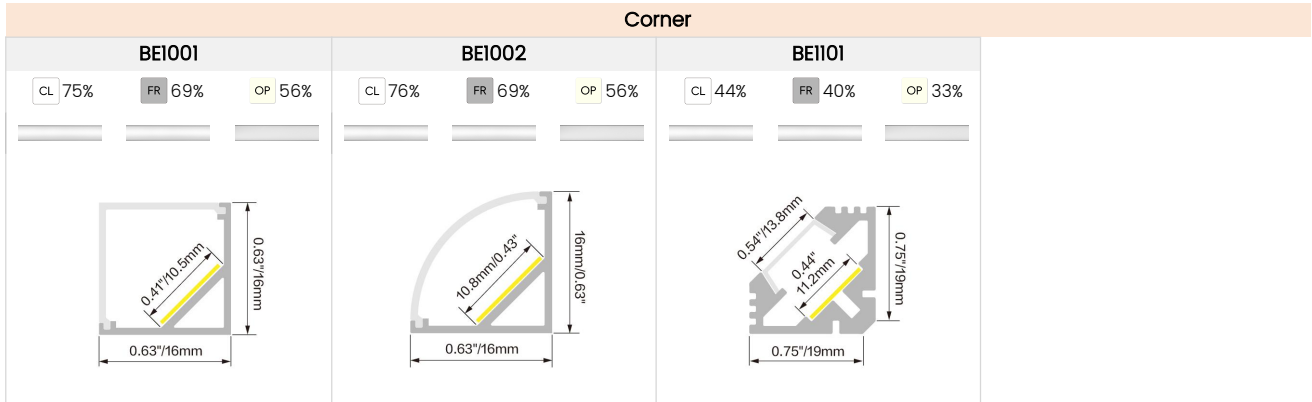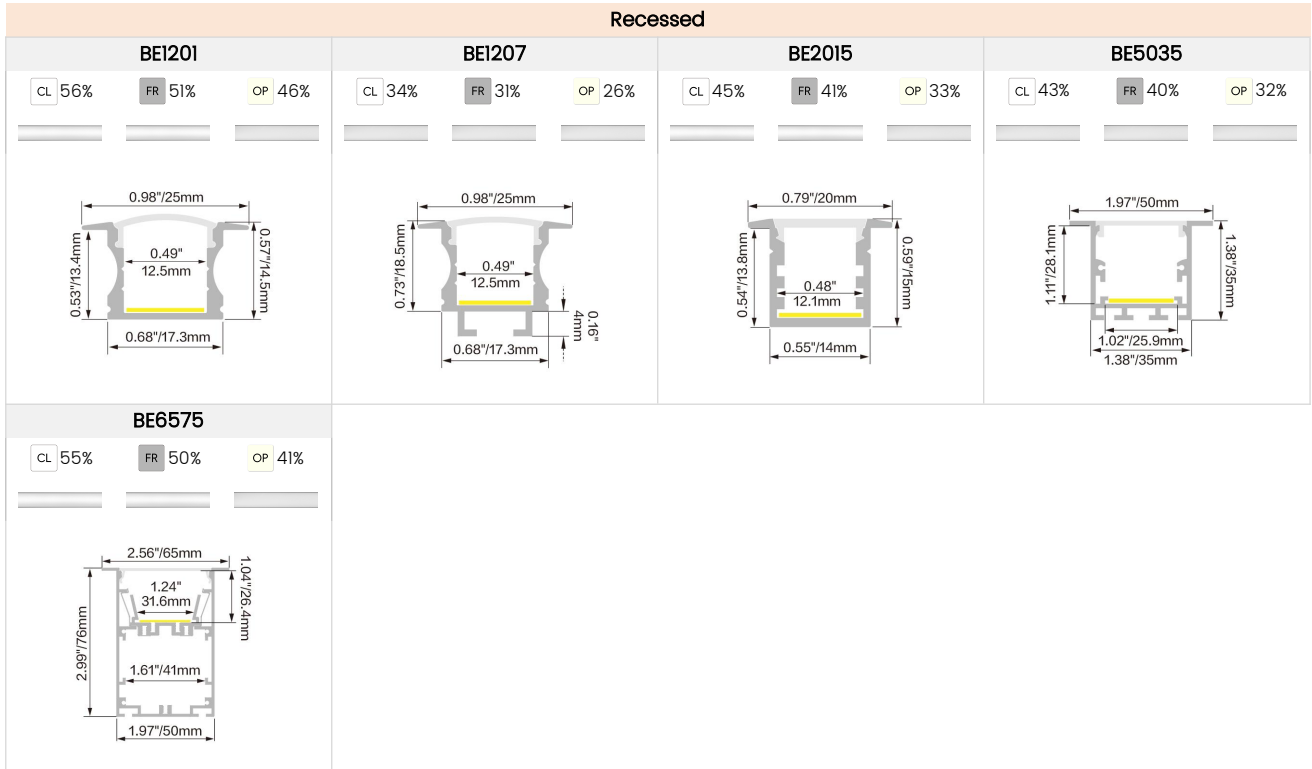

ANNO TAPE LONG RUN

Indoor · Static White

Specialty			
<p>BE1806 Bendable surface mounted</p> <p>CL 78% FR 71% OP 58%</p>	<p>BE2009 Coves</p> <p>CL 46% FR 42% OP 35%</p>	<p>BE4615 Borderless Inside Corner</p> <p>CL 49% FR 45% OP 36%</p>	<p>BE5315 Borderless Outside Corner</p> <p>CL 48% FR 44% OP 36%</p>
<p>BE6728 Staircase</p> <p>CL 42% FR 39% OP 32%</p>	<p>BE7030 Cove Recessed Borderless</p> <p>OP 54%</p>	<p>BE8833 Cove Recessed / Double-Layer Borderless</p> <p>CL 52% FR 47% OP 39%</p>	

Connectors & Additional Accessories (Optional, purchase for extra)

<p>N6012-STCN-2P-10 Strip to cable connector without wire, for 0.39in. (10mm) tape, 2 pin</p>	<p>N6012-STC-2P-10 Strip to cable connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 2 pin</p>	<p>N6012-STSJ-2P-10 Strip to strip jumper connector with 5.9lin. (15cm) wire, for 0.39in. (10mm) tape, 2 pin</p>	<p>N6012-STDCB-2P-10 Strip to cable with black female connector, for 0.39in. (10mm) tape, 2 pin</p>	<p>N6012-STDCW-2P-10 Strip to cable with white female connector, for 0.39in. (10mm) tape, 2 pin</p>
<p>N6012-STs-2P-10 Strip to strip connector, for 0.39in. (10mm) tape, 2 pin</p>	<p>C6012-LC-2P-10 L-shaped corner connector, for 0.39in. (10mm) tape, 2 pin</p>	<p>C6012-RC-2P-10 R-shaped corner connector, for 0.39in. (10mm) tape, 2 pin</p>	<p>MCB-DC-44 Male DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG</p>	<p>FCB-DC-44 Female DC connector with 0.66ft (20cm) cable, IP44, Dry & damp, 20 AWG</p>

ANNO TAPE LONG RUN

Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)
KV-24030-ASW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)
KV-24060-ASW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)
KV-24096-ASW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)	
KVF-24030-TDW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)	
KVF-24060-TDW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)	
KVF-24096-TDW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)	
KVF-24030-TDWJ	30W				Yes	Dry/Damp	Yes	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVF-24060-TDWJ	60W							7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVF-24096-TDWJ	96W							8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVF-24192-TDWJ	192W (96Wx2)							10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVF-24288-TDWJ	288W (96Wx3)							11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVF-24384-TDWJ	384W (96Wx4)							12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)	
KVD-24030-DIM	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)	
KVD-24060-DIM	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)	
KVD-24096-DIM	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)	
KVD-24030-DIMJ	30W				Yes	Dry/Damp	Yes	6.5 x 3.6 x 1in. (16.5 x 9.2 x 2.6cm)
KVD-24060-DIMJ	60W							7.4 x 3.6 x 1in. (18.8 x 9.2 x 2.6cm)
KVD-24096-DIMJ	96W							8.7 x 3.7 x 1.6in. (22 x 9.3 x 4.1cm)
KVD-24192-DIMJ	192W (96Wx2)							10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVD-24288-DIMJ	288W (96Wx3)							11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVD-24384-DIMJ	384W (96Wx4)							12.7 x 5.5 x 1.9in. (32.3 x 14 x 4.8cm)

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)

Code	Max Load	Input	Output	Class 2	With Junction Box	Environment	Size (L x W x H)	
KVG-24030-DW	30W	100-277VAC	24V	Yes	No	Dry/Damp	6.1 x 2.1 x 0.8in. (15.5 x 5.4 x 2cm)	
KVG-24060-DW	60W						7 x 2.4 x 0.9in. (17.8 x 6.1 x 2.4cm)	
KVG-24096-DW	96W					Dry/Damp/Wet	9.1 x 2.8 x 1.7in. (23 x 7 x 4.3cm)	
KVG-24030-DWJ	30W				Yes	Dry/Damp	Yes	6.5 x 3.7 x 1.6in. (16.5 x 9.5 x 4cm)
KVG-24060-DWJ	60W							7.4 x 3.7 x 1.6in. (18.8 x 9.5 x 4cm)
KVG-24096-DWJ	96W							8.7 x 3.7 x 1.6in. (22 x 9.5 x 4cm)
KVG-C24192-DWJ	192W (96Wx2)							10.9 x 4.3 x 1.8in. (27.8 x 11 x 4.5cm)
KVG-C24288-DWJ	288W (96Wx3)							11.9 x 4.3 x 1.8in. (30.1 x 11 x 4.5cm)
KVG-C24384-DWJ	384W (96Wx4)							12.8 x 5.5 x 1.9in. (32.5 x 14 x 4.8cm)

ANNO TAPE LONG RUN

Indoor · Static White

Wiring Diagram


Non-dimmable



Phase cut/Triac-dimmable



4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)

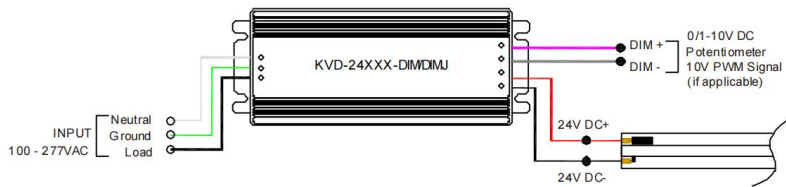

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)



ANNO TAPE LONG RUN

Indoor · Static White

24V Voltage Drop & Maximum Wire Length Chart

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	1588ft (484.0m)	999ft (304.5m)	628ft (191.4m)	395ft (120.4m)	248ft (75.5m)	156ft (47.5m)	98ft (29.8m)	61ft (18.5m)
20W / 0.8A	794ft (242.0m)	499ft (152.1m)	314ft (95.7m)	197ft (60.0m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	30ft (9.1m)
30W / 1.3A	529ft (161.2m)	333ft (101.5m)	209ft (63.7m)	131ft (39.9m)	82ft (24.9m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)
40W / 1.7A	397ft (121.0m)	249ft (75.9m)	157ft (47.8m)	98ft (29.8m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)
50W / 2.1A	317ft (96.6m)	199ft (60.6m)	125ft (38.1m)	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)
60W / 2.5A	264ft (80.4m)	166ft (50.6m)	104ft (31.7m)	65ft (19.8m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)
70W / 2.9A	226ft (68.8m)	142ft (43.2m)	89ft (27.1m)	56ft (17.0m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	8ft (2.4m)
80W / 3.3A	198ft (60.3m)	124ft (37.8m)	78ft (23.7m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)
90W / 3.8A	176ft (53.6m)	111ft (33.8m)	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)
100W / 4.2A	158ft (48.1m)	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)
110W / 4.6A	144ft (43.8m)	90ft (27.4m)	57ft (17.3m)	35ft (10.6m)	22ft (6.7m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)
120W / 5.0A	132ft (40.2m)	83ft (25.3m)	52ft (15.8m)	32ft (9.7m)	20ft (6.1m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)
130W / 5.4A	122ft (37.1m)	76ft (23.1m)	48ft (14.6m)	30ft (9.1m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)
140W / 5.8A	113ft (34.4m)	71ft (21.6m)	44ft (13.4m)	28ft (8.5m)	17ft (5.1m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)
150W / 6.3A	105ft (32.0m)	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)
160W / 6.7A	99ft (30.1m)	62ft (18.9m)	39ft (11.8m)	24ft (7.3m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)
170W / 7.1A	93ft (28.3m)	58ft (17.6m)	36ft (10.9m)	23ft (7.0m)	14ft (4.2m)	9ft (2.7m)	5ft (1.5m)	3ft (0.9m)
180W / 7.5A	88ft (26.8m)	55ft (16.7m)	34ft (10.3m)	22ft (6.7m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
190W / 7.9A	83ft (25.3m)	52ft (15.8m)	33ft (10.0m)	20ft (6.0m)	13ft (3.9m)	8ft (2.4m)	5ft (1.5m)	3ft (0.9m)
200W / 8.3A	79ft (24.0m)	49ft (14.9m)	31ft (9.4m)	19ft (5.7m)	12ft (3.6m)	7ft (2.1m)	4ft (1.2m)	3ft (0.9m)
210W / 8.8A	75ft (22.8m)	47ft (14.3m)	29ft (8.8m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
220W / 9.2A	72ft (21.9m)	45ft (13.7m)	28ft (8.5m)	18ft (5.4m)	11ft (3.3m)	7ft (2.1m)	4ft (1.2m)	2ft (0.6m)
230W / 9.6A	69ft (21.0m)	43ft (13.1m)	27ft (8.2m)	17ft (5.1m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
240W / 10.0A	66ft (20.1m)	41ft (12.5m)	26ft (7.9m)	16ft (4.8m)	10ft (3.0m)	6ft (1.8m)	4ft (1.2m)	2ft (0.6m)
250W / 10.4A	63ft (19.2m)	40ft (12.1m)	25ft (7.6m)	15ft (4.5m)	9ft (2.7m)	6ft (1.8m)	3ft (0.9m)	2ft (0.6m)