

AERO TAPE LONG RUN Indoor · Static White

Features

- Max run length up to 59ft (18m) from single power feed
- Field cuttable & joinable
- Low voltage DC24V
- 100-400 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date


Fixture type

Project name

Project phase



Dimension

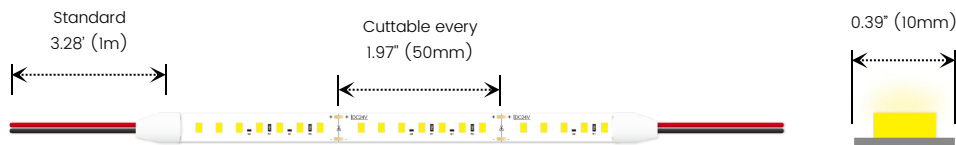

Order Code

Series	Environment	Voltage	Temp./Color	Power
AEROLR	D2 Dry (IP20)	24 DC24V	18 1800K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 65 6500K	152 1.52W/ft ~100 lm/ft 305 3.05W/ft ~300 lm/ft 457 4.57W/ft ~400 lm/ft

Assembly Builder

Left Feed Entry				Right Feed Entry				Illuminated Length ¹		
F	Front	OW	Open wire 3.28'	F	Front	OW	Open wire 3.28'	Max	59'	~152W
C	Closed	MC	Male connector with 0.66' cable	C	Closed	MC	Male connector with 0.66' cable		45.9'	~3.05W
		FC	Female connector with 0.66' cable			FC	Female connector with 0.66' cable		36.1'	~4.57W
		NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry	Increment	1.97'	

1. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap)

Temp./Color	1.52W/ft	3.05W/ft	4.57W/ft
1800K	130	256	381
2200K	134	265	395
2400K	139	274	409
2700K	147	290	433
3000K	152	299	446
3500K	153	302	451
4000K	158	312	465
6500K	155	305	456
Max. Run for Class 2 Low Voltage (ft)	50.5	25.2	16.8
Max. Run Length (ft)	59	45.9	36.1
Storage Temperature	-13-140°F	-13-140°F	-13-140°F
Ambient Temperature	-4-113°F	-4-113°F	-4-113°F

Technical Details

Width	0.39" (10mm)
PCB Width	0.39" (10mm)
LED Quantity	42 LEDs/ft (140 LEDs/m)
Beam Angle	120°
Efficacy	102.3lm/W @4000K 3.05W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Life (L70)	> 54,000 hours
Max. Length Per Reel	164' (50M)

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28' (1m), 20 AWG
(wire length customizable)



MC: Male connector, **Dry & Damp**

Standard 0.66' (20cm), 20 AWG



FC: Female connector, **Dry &**

Damp, Standard 0.66' (20cm), 20 AWG


AERO TAPE LONG RUN Indoor · Static White

Channel Compatibility


: No pixelation

Universal


BE1215




BE1815




BE1415




BE2015




BE1202




BE1201



BE1207




BE1203




Architectural


BE5615




BE7615




BE4615




BE5315




BE8833




BE5075



BE3535




BE5035




Main lighting


BE6575



BE9358




BE60




Special lighting

BE6728




BE2009




AERO TAPE LONG RUN Indoor · Static White

: Slight pixelation

Universal

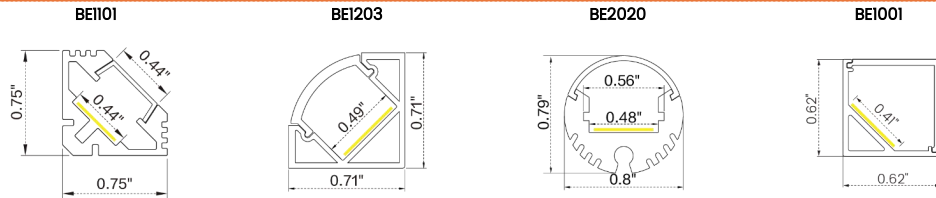

Special lighting

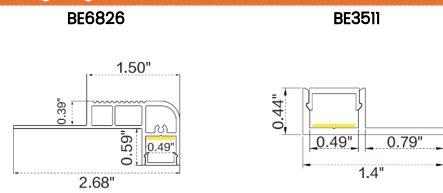

AERO TAPE LONG RUN Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVF-24060-TDW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.00" *2.40" *0.94"
KVF-24096-TDW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVF-24150-TDW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24200-TDW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.00" *3.07" *1.85"
KVF-24300-TDW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.85"

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVD-24060-DIM	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.00" *2.40" *0.94"
KVD-24096-DIM	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVD-24150-DIM	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVD-24200-DIM	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	13.38" *11.02" *7.28"
KVD-24300-DIM	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.13" *0.79"
KVG-24060-DW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.41" *0.94"
KVG-24096-DW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.06" *2.76" *1.69"
KVG-24150-DW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24200-DW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24300-DW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

Wiring Diagram

Non-dimmable

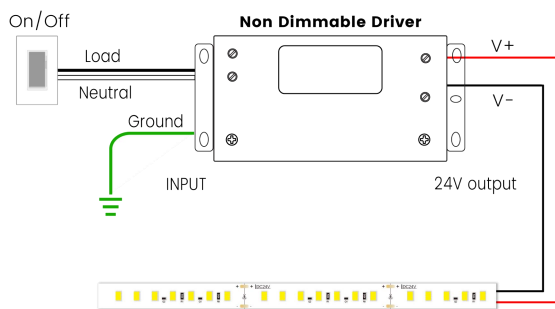

Dimmable

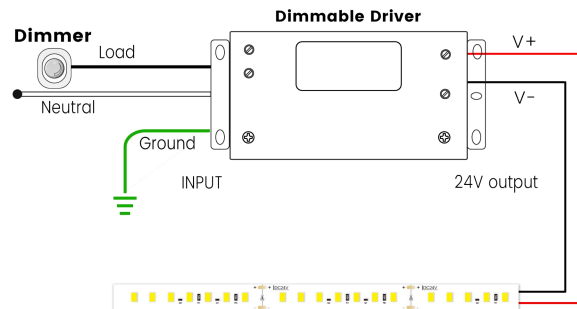

AERO TAPE LONG RUN Indoor · Static White

Connectors (Optional, purchase for extra)



NI4CO-STCN-2P-10
Strip to cable connector without wire, for 0.39" (10mm) tape, 2 pin



NI4CO-STC-2P-10
Strip to cable connector with 5.91" (15cm) wire, for 0.39" (10mm) tape, 2 pin



NI4CO-STSJ-2P-10
Strip to strip jumper connector with 5.91" (15cm) wire, for 0.39" (10mm) tape, 2 pin



NI4CO-STDCB-2P-10
Strip to cable with black male & female connector, for 0.39" (10mm) tape, 2 pin



NI4CO-STDCW-2P-10
Strip to cable with white male & female connector, for 0.39" (10mm) tape, 2 pin



NI4CO-STs-2P-10
Strip to strip connector, for 0.39" (10mm) tape, 2 pin



CI4CO-LC-2P-10
L-shaped corner connector, for 0.39" (10mm) tape, 2 pin



CI4CO-RC-2P-10
R-shaped corner connector, for 0.39" (10mm) tape, 2 pin

Additional Accessories (Optional, purchase for extra)



MCB-DC-44
Male DC connector with 0.66' (20cm) cable, IP44, Dry & damp, 20 AWG



FCB-DC-44
Female DC connector with 0.66' (20cm) cable, IP44, Dry & damp, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness