

ALTA TAPE ULTRA Indoor · Static White

Features

- Superior brightness with higher lumen output
- Field cuttable & joinable
- Low voltage DC24V
- 1100 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date


Fixture type

Project name

Project phase



Dimension

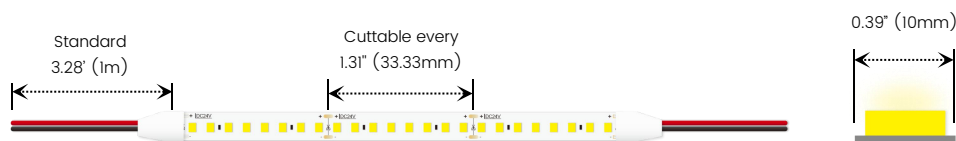

Order Code

Series	Environment	Voltage	Temp./Color	Power
ALTAU	D2	Dry (IP20)	24	DC24V
			18	1800K
			22	2200K
			24	2400K
			27	2700K
			30	3000K
			35	3500K
			40	4000K
			65	6500K
			854	8.54W/ft
				~1100 lm/ft

Assembly Builder

Left Feed Entry				Right Feed Entry				Illuminated Length ¹		
F	Front	OW	Open wire 3.28'	F	Front	OW	Open wire 3.28'	Max	13.1'	~8.54W
C	Closed	MC	Male connector with 0.66" cable	C	Closed	MC	Male connector with 0.66" cable	Increment	1.31"	
		FC	Female connector with 0.66" cable			FC	Female connector with 0.66" cable			
		NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry			

1. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap)

Temp./Color	8.54W/ft
1800K	953
2200K	988
2400K	1023
2700K	1081
3000K	1116
3500K	1128
4000K	1163
6500K	1139
Max. Run for Class 2 Low Voltage (ft)	13.1
Max. Run Length (ft)	13.1
Storage Temperature	-13~140°F
Ambient Temperature	-4~113°F

Technical Details

Width	0.39" (10mm)
PCB Width	0.39" (10mm)
LED Quantity	72 LEDs/ft (240 LEDs/M)
Beam Angle	120°
Efficacy	136.2lm/W @4000K 8.54W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Life (L70)	> 54,000 hours
Max. Length Per Reel	164' (50M)

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28' (1m), 20 AWG
(wire length customizable)



MC: Male connector, **Dry & Damp**
Standard 0.66' (20cm), 20 AWG



FC: Female connector, **Dry & Damp**
Standard 0.66' (20cm), 20 AWG


ALTA TAPE ULTRA Indoor · Static White

Channel Compatibility


: No pixelation

Universal


BE1215




BE1815




BE1415




BE2015




BE1202




BE1201




BE1207




BE101



BE1203




BE2020




Architectural


BE5615




BE7615




BE4615




BE5315




BE8833




BE5075



BE3535




BE5035




Main lighting


BE6575



BE9358




BE60




Special lighting


BE6728




BE6826



BE2009



BE3511




ALTA TAPE ULTRA Indoor · Static White

: Slight pixelation


Universal

BEI206




Special lighting


BEI2017




BEI403




BE6916




BE9151



BEI3350



BEI402



ALTA TAPE ULTRA Indoor · Static White

Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L*W*H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

Phase cut/Triac-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L*W*H)
KVF-24030-TDW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVF-24060-TDW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.00" *2.40" *0.94"
KVF-24096-TDW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVF-24150-TDW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KVF-24200-TDW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KVF-24300-TDW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.85"

4 in 1-dimmable (0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L*W*H)
KVD-24030-DIM	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.12" *0.78"
KVD-24060-DIM	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.40" *0.94"
KVD-24096-DIM	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KVD-24150-DIM	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVD-24200-DIM	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	13.38" *11.02" *7.28"
KVD-24300-DIM	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

5 in 1-dimmable (Triac/0-10V/1-10V/Potentiometer/10V PWM)


Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L*W*H)
KVG-24030-DW	30W	100-277VAC	24V	Yes	Yes	Dry/Damp	6.10" *2.13" *0.79"
KVG-24060-DW	60W	100-277VAC	24V	Yes	Yes	Dry/Damp	7.01" *2.41" *0.94"
KVG-24096-DW	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.06" *2.76" *1.69"
KVG-24150-DW	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24200-DW	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.08" *3.07" *1.85"
KVG-24300-DW	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.87" *3.07" *1.89"

Wiring Diagram

Non-dimmable

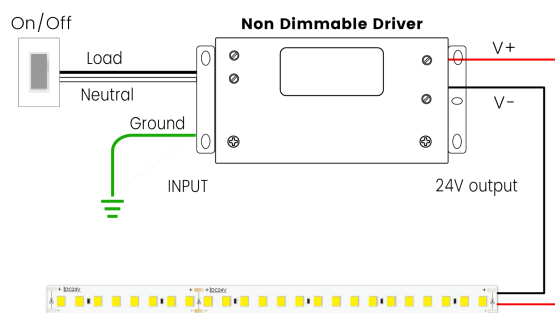

Dimmable

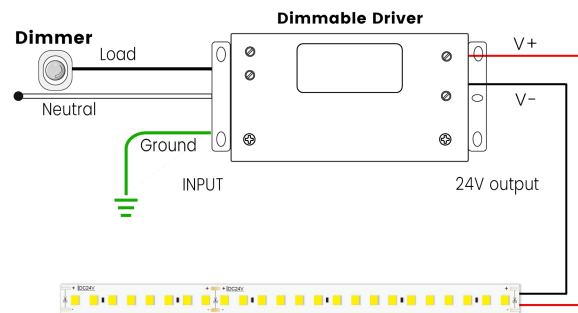

Connectors (Optional, purchase for extra)

ALTA TAPE ULTRA Indoor · Static White



NI4CO-STCN-2P-10
Strip to cable connector without wire, for 0.39" (10mm) tape, 2 pin



NI4CO-STC-2P-10
Strip to cable connector with 5.91" (15cm) wire, for 0.39" (10mm) tape, 2 pin



NI4CO-STSJ-2P-10
Strip to strip jumper connector with 5.91" (15cm) wire, for 0.39" (10mm) tape, 2 pin



NI4CO-STDCB-2P-10
Strip to cable with black male & female connector, for 0.39" (10mm) tape, 2 pin



NI4CO-STDCW-2P-10
Strip to cable with white male & female connector, for 0.39" (10mm) tape, 2 pin



NI4CO-STSS-2P-10
Strip to strip connector, for 0.39" (10mm) tape, 2 pin



CI4CO-LC-2P-10
L-shaped corner connector, for 0.39" (10mm) tape, 2 pin



CI4CO-RC-2P-10
R-shaped corner connector, for 0.39" (10mm) tape, 2 pin



NI6CO-L-2P-10
L-shaped connector, for 0.39" (10mm) tape, 2 pin

Additional Accessories (Optional, purchase for extra)



MCB-DC-44
Male DC connector with 0.66' (20cm) cable, IP44, Dry & damp, 20 AWG



FCB-DC-44
Female DC connector with 0.66' (20cm) cable, IP44, Dry & damp, 20 AWG



VHB
VHB 3M adhesive back tape, stronger stickiness