

BELA TAPE PIXEL RGBW Indoor · Pixel RGBW

Features

- Addressable dynamic color, 3 pixels/ft
- Field cuttable & joinable
- Low voltage DC24V
- 200 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date


Fixture type

Project name

Project phase



Dimension

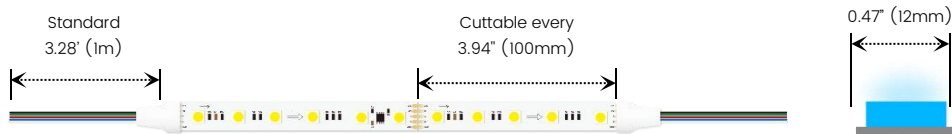

Order Code

Series	Environment	Voltage	Temp./Color	Power
BELA	D2 Dry (IP20)	24 DC24V	PROBW30 Pixel RGBW (W=3000K)	549 5.49W/ft ~200 lm/ft

Assembly Builder

Left Feed Entry				Right Feed Entry				Illuminated Length ¹		
F	Front	OW	Open wire 3.28'	F	Front	OW	Open wire 3.28'	Max.	16.4'	~5.49W
C	Closed	PMC	Male connector with 0.98' cable	C	Closed	PMC	Male connector with 0.98' cable	Increment	3.94'	
		PFC	Female connector with 0.98' cable			PFC	Female connector with 0.98' cable			
		NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry			

1. Production length = Illuminated length + End cap extension length (refer to below page for extension length of each end cap)

Temp./Color	5.49W/ft
R	27
G	71
B	21
W30	73
RGBW30	180
Max. Run for Class 2 Low Voltage (ft)	13.1
Max. Run Length (ft)	16.4
Storage Temperature	-13-140°F
Ambient Temperature	-4-113°F

Technical Details

Width	0.47" (12mm)
PCB Width	0.47" (12mm)
LED Quantity	18 LEDs/ft (60 LEDs/M)
Beam Angle	120°
Efficacy	32.8lm/W @RGBW30 5.49W
CRI	Ra ≥ 90
LED MacAdam	3 steps
Pixel/ft	3
Life (L70)	> 30,000 hours
Max. Length Per Reel	164' (50M)

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 3.28' (1m), 20 AWG
(wire length customizable)



PMC: Male connector, **Wet**
Standard 0.98' (30cm), 22 AWG



PFC: Female connector, **Wet**
Standard 0.98' (30cm), 22 AWG

BELA TAPE PIXEL RGBW


Indoor · Pixel RGBW

Channel Compatibility


: No pixelation

Architectural


BE5035




BE3535



BE5075




BE8833




Main lighting


BE6575



BE9358




BE60



Special lighting


BE2009




: Slight pixelation

Universal


BE1215




BE1815




BE1415




BE2015




BE1202



BE1201




BE1207




Architectural

BE7615



BE5315




BELA TAPE PIXEL RGBW

Indoor · Pixel RGBW

Special lighting

BE6728



Drivers

Non-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KV-24030-ASW	30W	100-277VAC	24V	No	Yes	Dry/Damp	6.10" *2.12" *0.78"
KV-24060-ASW	60W	100-277VAC	24V	No	Yes	Dry/Damp	7.00" *2.40" *0.94"
KV-24096-ASW	96W	100-277VAC	24V	No	Yes	Dry/Damp/Wet	9.05" *2.75" *1.69"
KV-24150-ASW	150W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24200-ASW	200W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.07" *3.07" *1.85"
KV-24300-ASW	300W	100-277VAC	24V	No	No	Dry/Damp/Wet	10.86" *3.07" *1.85"

DMX512-dimmable

Code	Max Load	Input	Output	Dimmable	Class 2	Environment	Size (L *W *H)
KVX-24096-4C-A	96W	100-277VAC	24V	Yes	Yes	Dry/Damp/Wet	9.05" *3.07" *0.98"
KVX-24150-4C-A	150W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.90" *3.07" *0.98"
KVX-24200-4C-A	200W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	10.90" *3.07" *0.98"
KVX-24300-4C-A	300W	100-277VAC	24V	Yes	No	Dry/Damp/Wet	11.85" *3.07" *0.98"

DMX Decoders


Code	Description
LT-904	4 channels output, up to 576W output power
LT-916	16 channels output, up to 1152W output power
LT-932	32 channels output, up to 1728W output power

Controllers

Code	Description
DINA-DR micro	DMX 60 channels, DMX Stand Alone controller with 10 scenes, USB connectivity for programming
SLESA-U9	DMX 256 channels, USB connection, standalone mode with 1 area and 20 scenes
STICK-GA2	DMX 512 channels, ready to use (pre-loaded with 8 scenes and 170 RGB fixtures)
STICK-CW4	DMX 1024 channels, up to 36 scenes stored and directly recalled via 6 touch sensitive buttons

Wiring Diagram

Dimmable

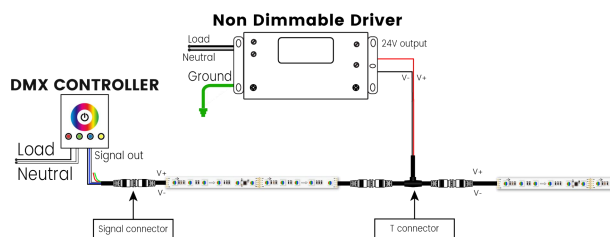

BELA TAPE PIXEL RGBW Indoor · Pixel RGBW

Connectors (Optional, purchase for extra)



C6012-STCN-5P-12
Strip to cable connector without wire, for 0.47" (12mm) tape, 5 pin



C6012-STC-5P-12
Strip to cable connector with 5.91" (15cm) wire, for 0.47" (12mm) tape, 5 pin



C6012-STSJ-5P-12
Strip to strip jumper connector with 5.91" (15cm) wire, for 0.47" (12mm) tape, 5 pin



C6012-STMKB-5P-12
Strip to cable with black male & female connector, for 0.47" (12mm) tape, 5 pin



C6012-LC-5P-12
L-shaped corner connector, for 0.47" (12mm) tape, 5 pin



C6012-RC-5P-12
R-shaped corner connector, for 0.47" (12mm) tape, 5 pin



C6012-ST5-5P-12
Strip to strip connector, for 0.47" (12mm) tape, 5 pin

Additional Accessories (Optional, purchase for extra)



PMCW-5P-67
Male connector with 0.98' (30cm) white cable, 5 pin, IP67, Wet, 22 AWG



PFCW-5P-67
Female connector with 0.98' (30cm) white cable, 5 pin, IP67, Wet, 22 AWG



SW-3P-6
Shielded signal wire, 3 pin, 18AWG standard 20' (6m), **customizable**



SC-3P-6
XLR3 extension signal network connector, standard 20' (6m), **customizable**



NC-6
RJ 45 extension network connector, standard 20' (6m), **customizable**



MFTCB-5P-67
Male and female T-shaped connector with black cable, 5 pin, IP67, Wet



VHB
VHB 3M adhesive back tape, stronger stickiness